


Waste and water systems



The city is a goldmine of water and nutrients

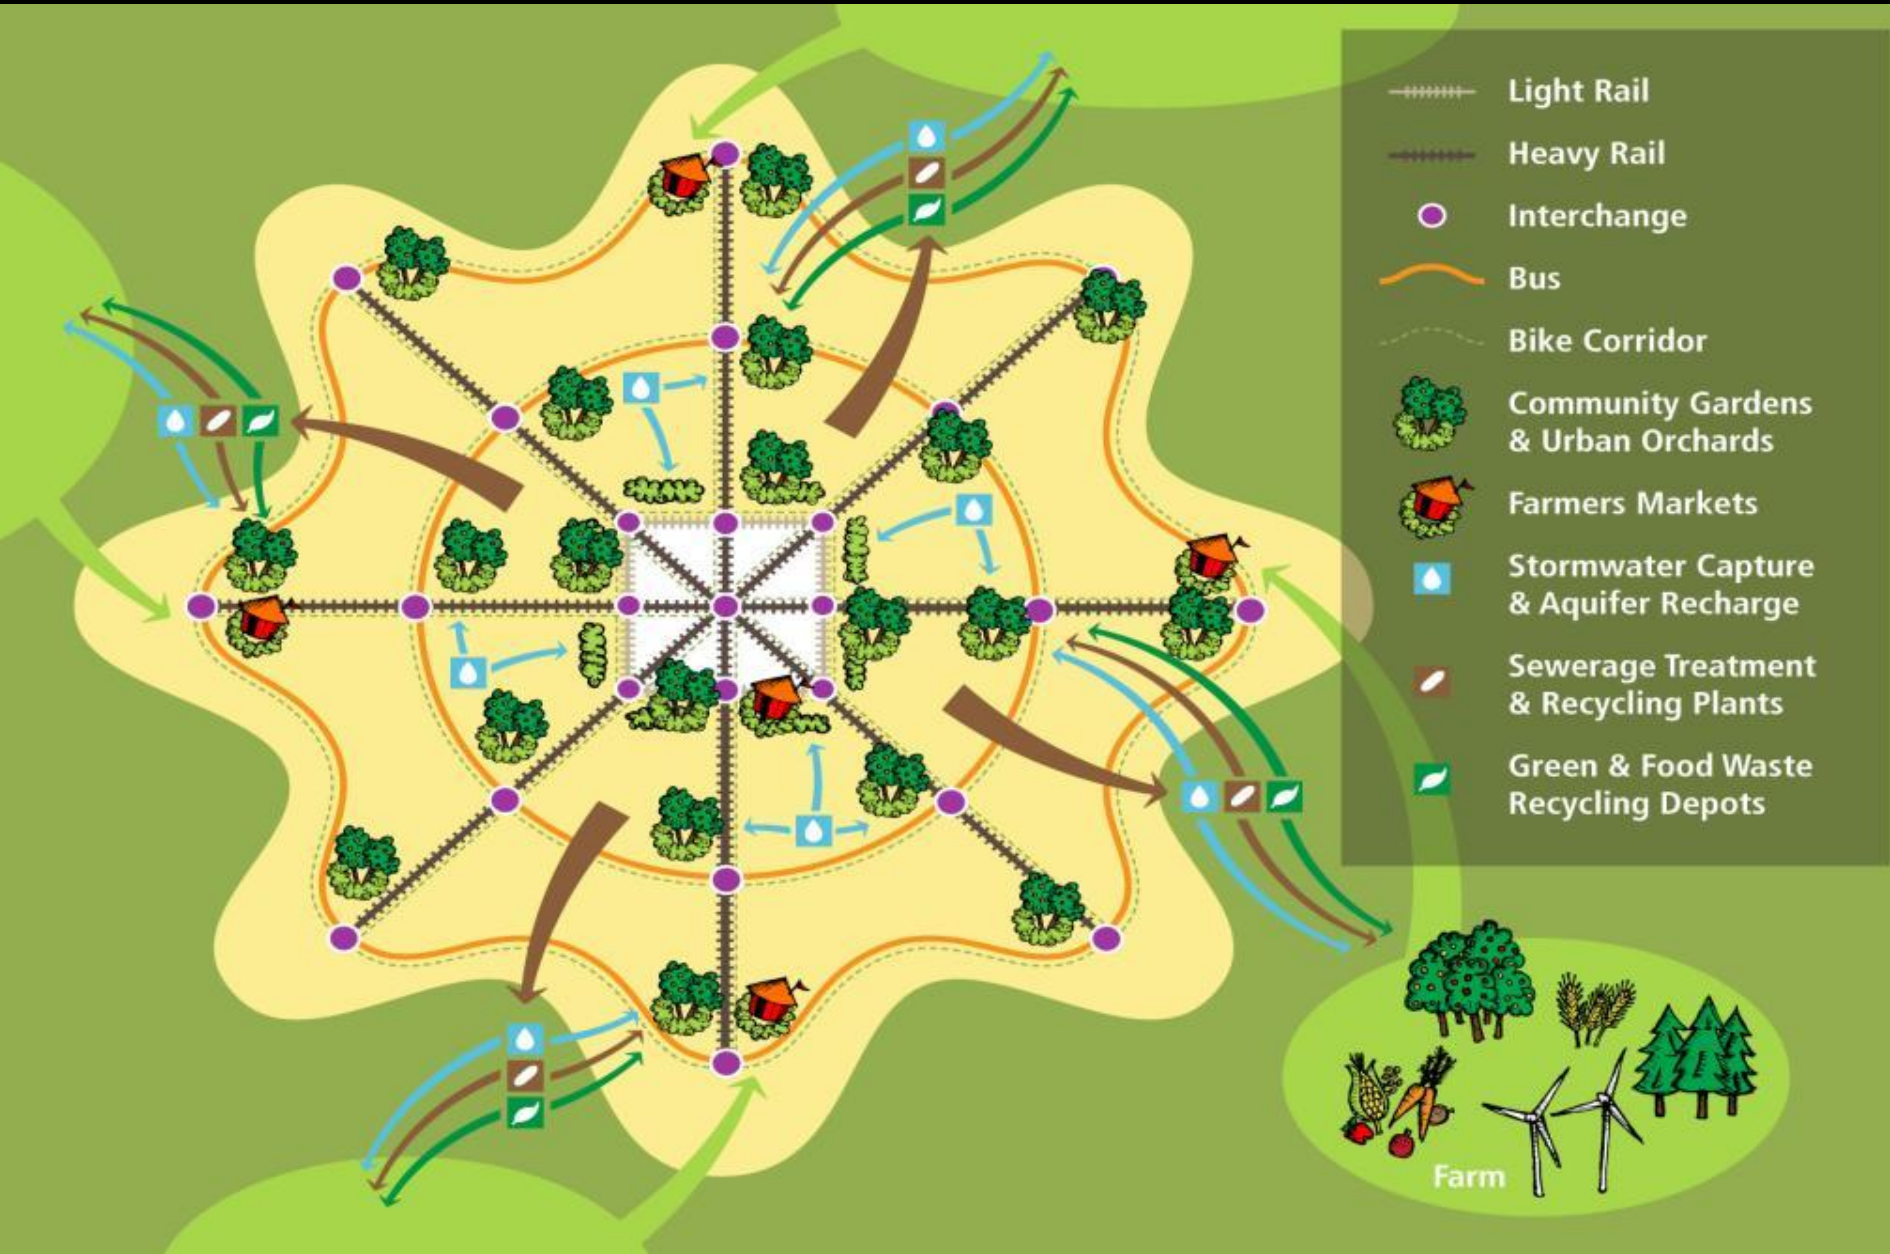

We came second to America...again

Aussie households produce about a tonne of domestic waste per year (USA 2 tonnes), 60% of which is compostable, but most of which goes to land fill

Through the use of green bins, recycling bins, & resource recovery systems South Australia diverts 70% of its domestic, construction and commercial waste from landfill saving 5 million tonnes of CO₂ emissions annually


Through good policies and industry leadership
85%+ of SA's organic waste is composted and
returned to ag & garden production





Recovery of nutrients from sewerage

- Sewerage contains nutrients used in ag production
- The Canadian Ostara treatment process reclaims nutrients from the black water and converts them into a commercial fertiliser, Crystal Green 5 N - 28 P - 0 K +10% Mg representing 90 per cent of the phosphorus, 40 percent of the ammonia & 75% of magnesium
- This saves pipe clogging, waterway and marine contamination and provides fertiliser , requiring only 14% of the energy required for fertiliser manufactured from non-renewable mineral sources

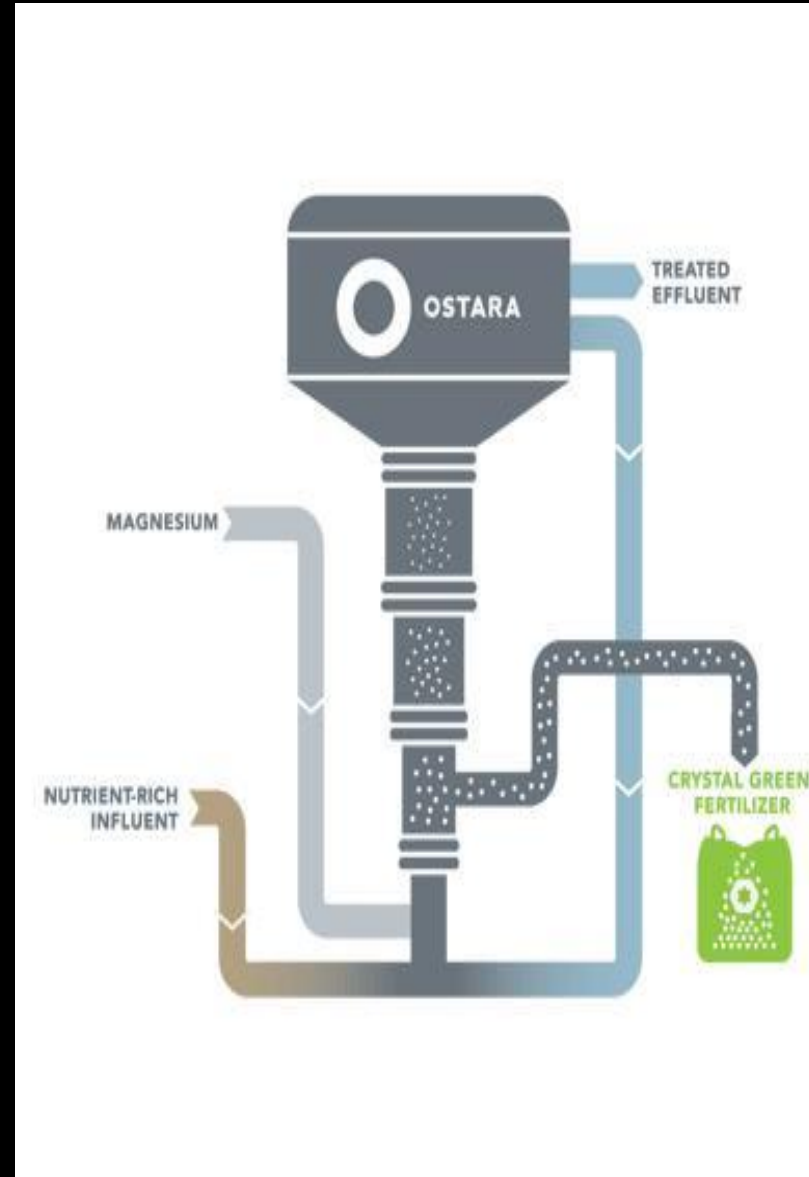

•COMPOST TOILET& REEDBED

- Saves & re-uses water
- Composts human waste


Compost toilet




Clumping bamboo



Bulrushes clean the water

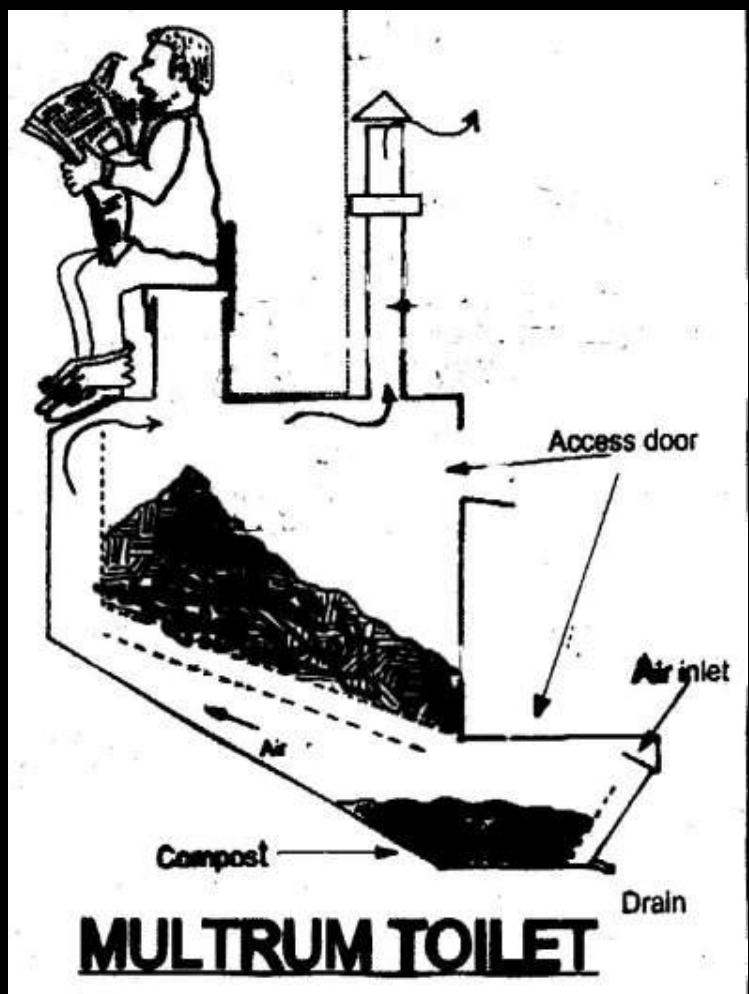

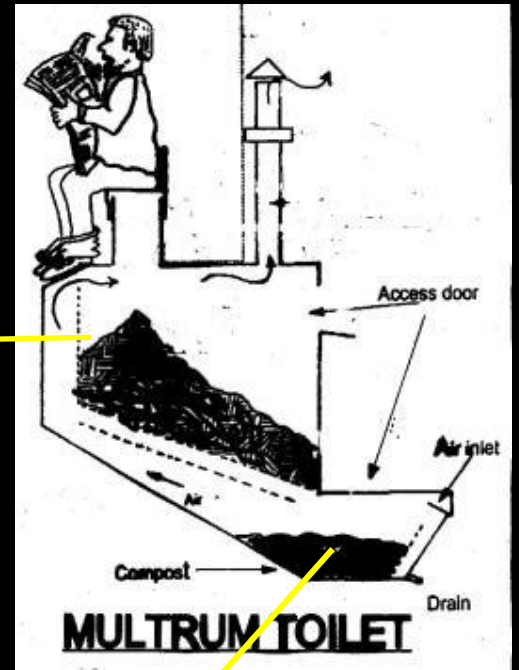

Compost



Compost Toilet is NOT:

Composting in the field




A long drop



Design:

Landscape, Placement

Access from both inside and outside

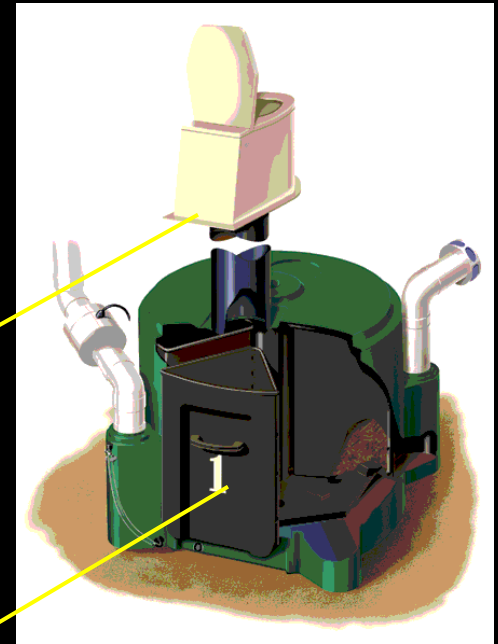


Rota loo




METHANE
FOR
COOKING



COMPOSTING



LOST
RESOURCE

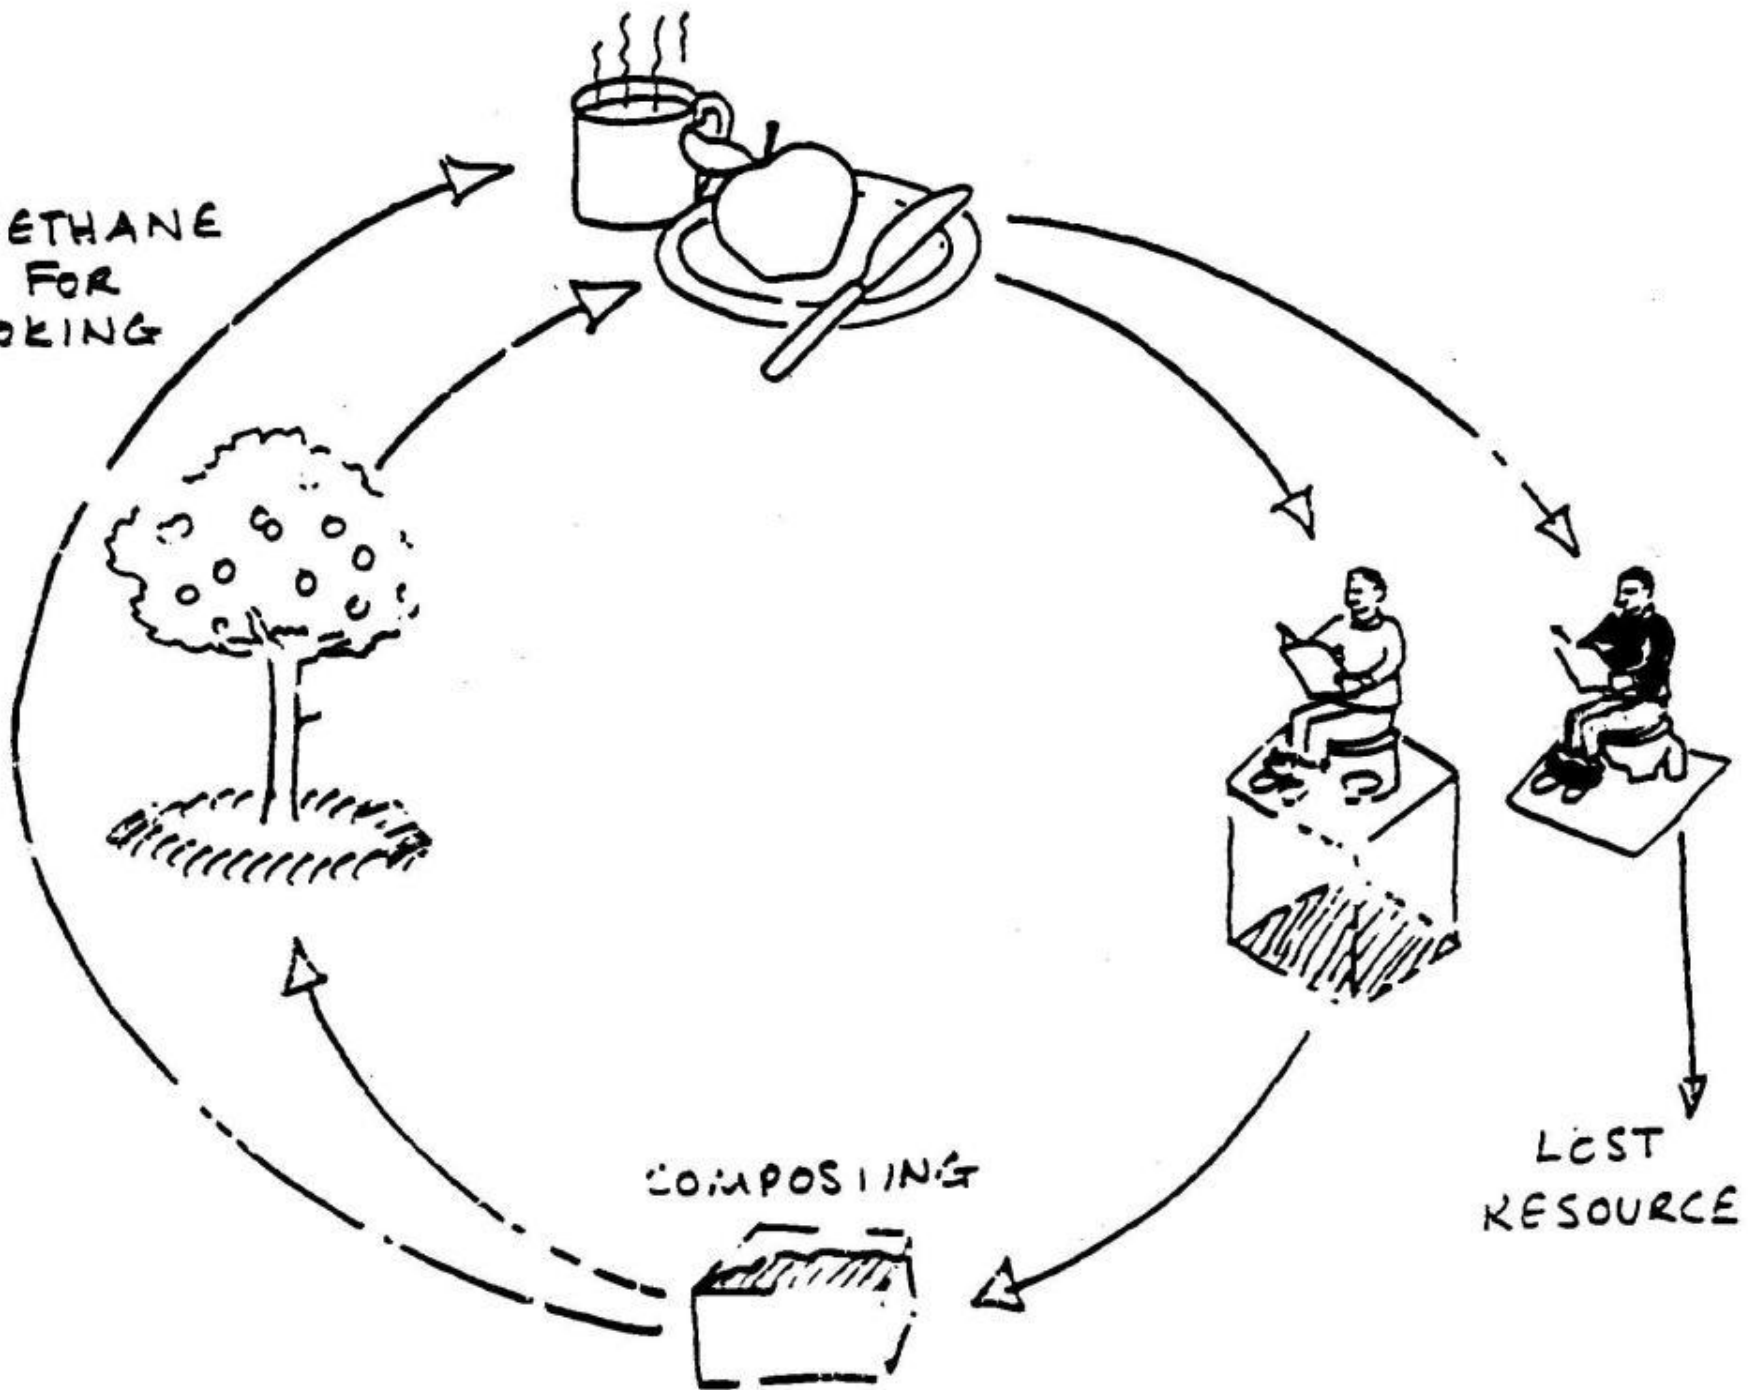

39 degrees and windy – is this responsible water use in the World's driest inhabited continent?



Catching and storing water

Get the best out of your current supply through:



- Drip irrigation (effective delivery may rise from 50% to above 90%)
- Soil improvement
- Deficit irrigation
- Mulch
- Weed control
- Windbreaks
- Different crops
- Aquifer Storage and Recharge with 'spare' water


WATER CATCHMENT




**Water should be captured on site and stored for use.
Rebates are available for tanks and plumbing**



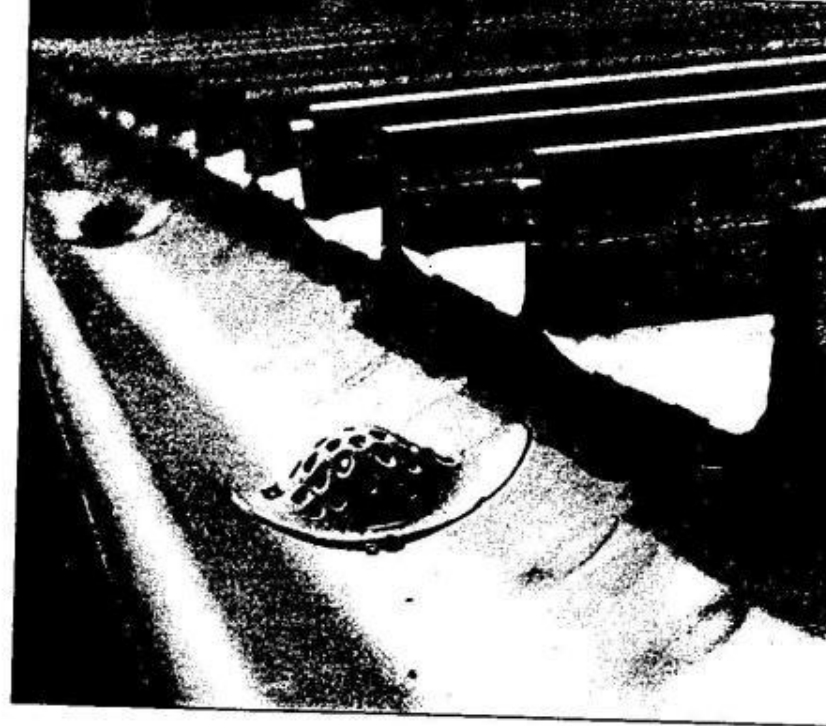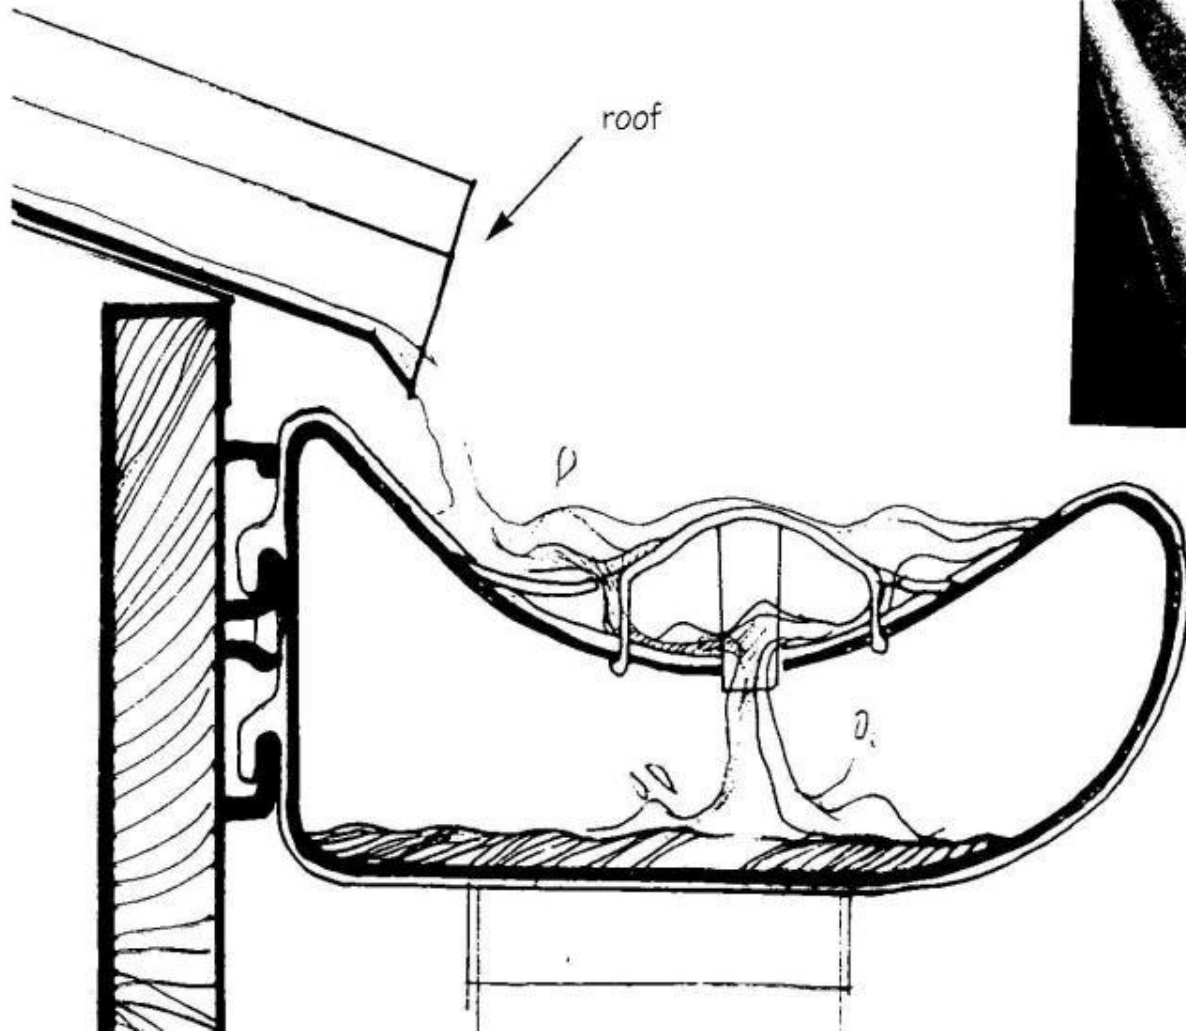

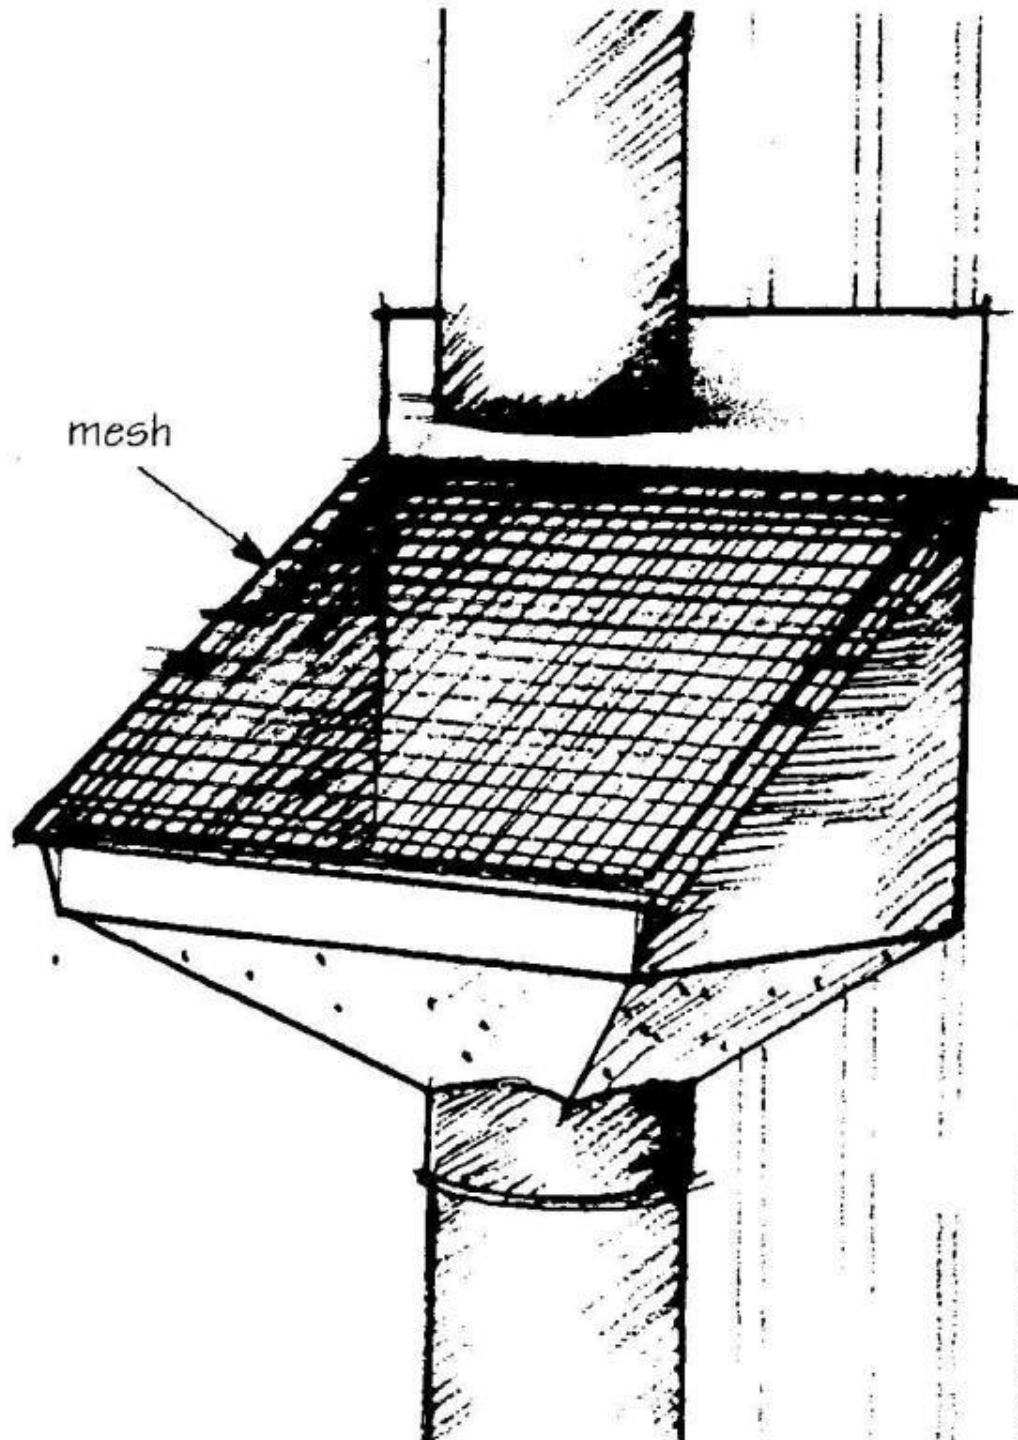

mesh

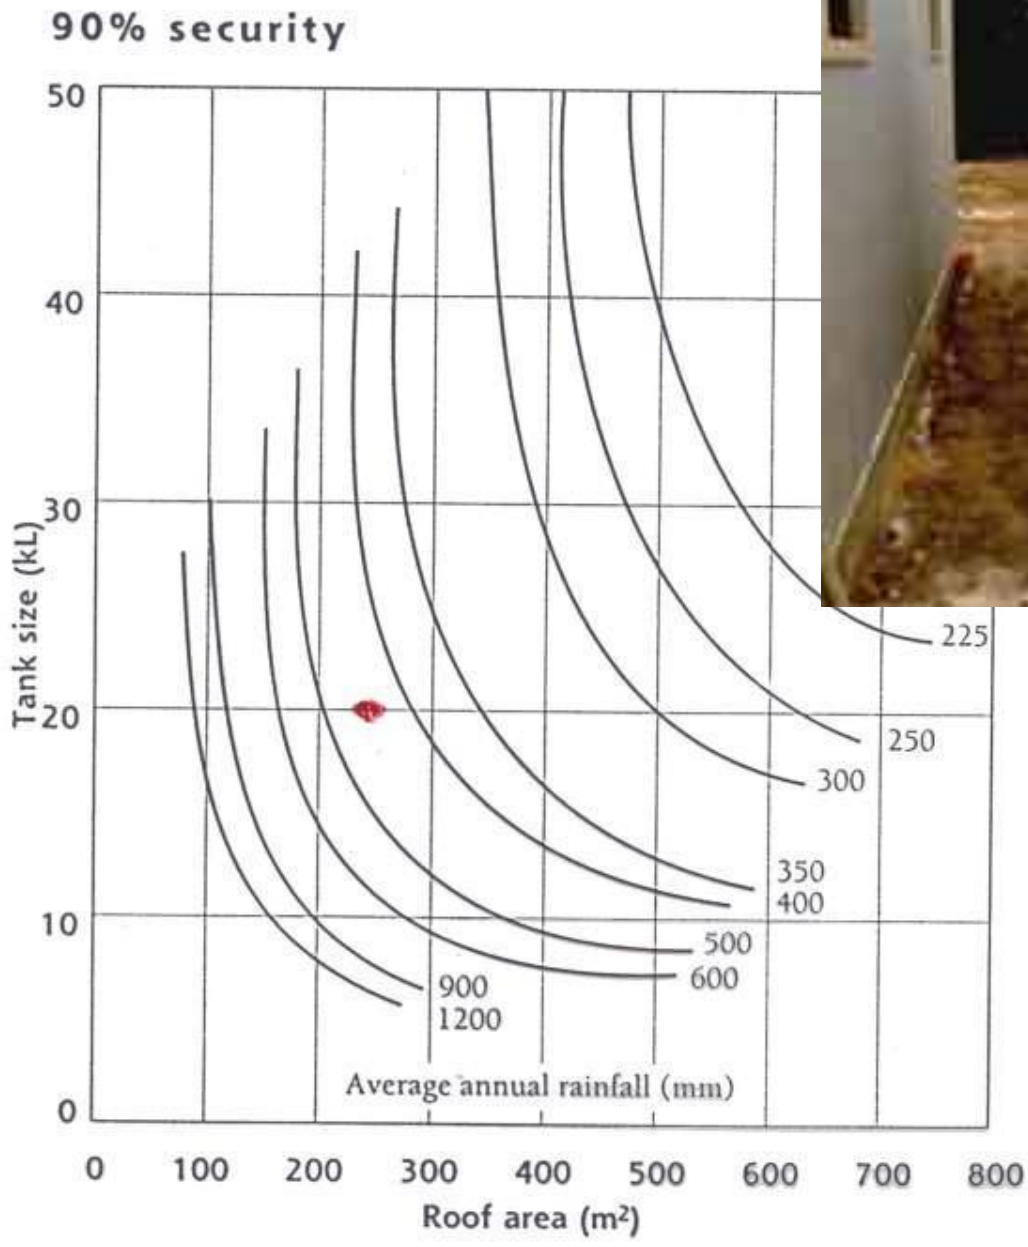

Source: Sustainable House, Michael Mobbs





Rainwater - the Maths

- Rainwater catchment
In Adelaide with a rainfall of about 530mm, 250 square metres of roof generates about 130 kilolitres of water annually but the bulk falls in winter.
If captured, 53 kilolitres can be used in the house and then flow through the greywater treatment system to the fruit trees.
- The rest is available for vegetable growing and would support a garden of about 50sqm (37 kilolitres req)
- Significant storage would be needed as only 33 kilolitres would be captured on average over summer; perhaps 50 kilolitres of storage may provide fair water security
- A larger roof area would provide more water security


Annual needs of a 1x1m square vegetable garden in Adelaide

- Water: Up to 0.75metre of irrigation water (=0.75kilolitres)
Cost: ~ 80c if using mains, but could be rain water
- Compost: ~ 2kg. Cost: ~15c
- Mulch: 0.3 bale of cereal straw. Cost: ~\$1
- Seedlings: ~ \$2.00
- Total Cost: ~ \$4.00

Note:


Figures assume using mulching techniques in summer & drippers


Prices assume bulk buying/ commercial quantities of seedlings, mulch and compost

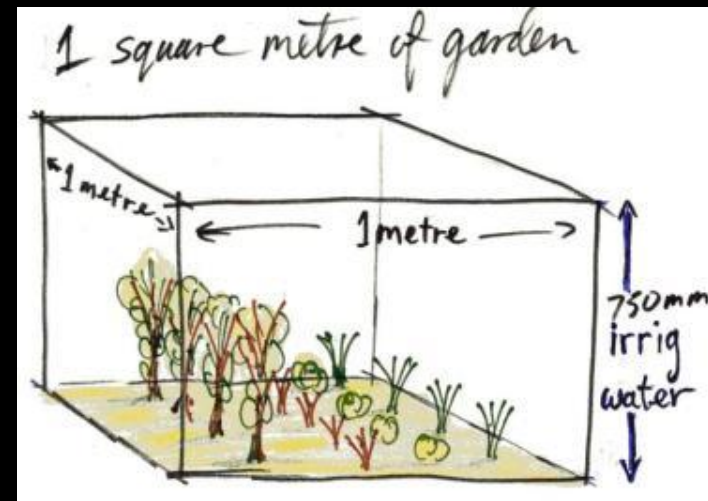

Using waterwater




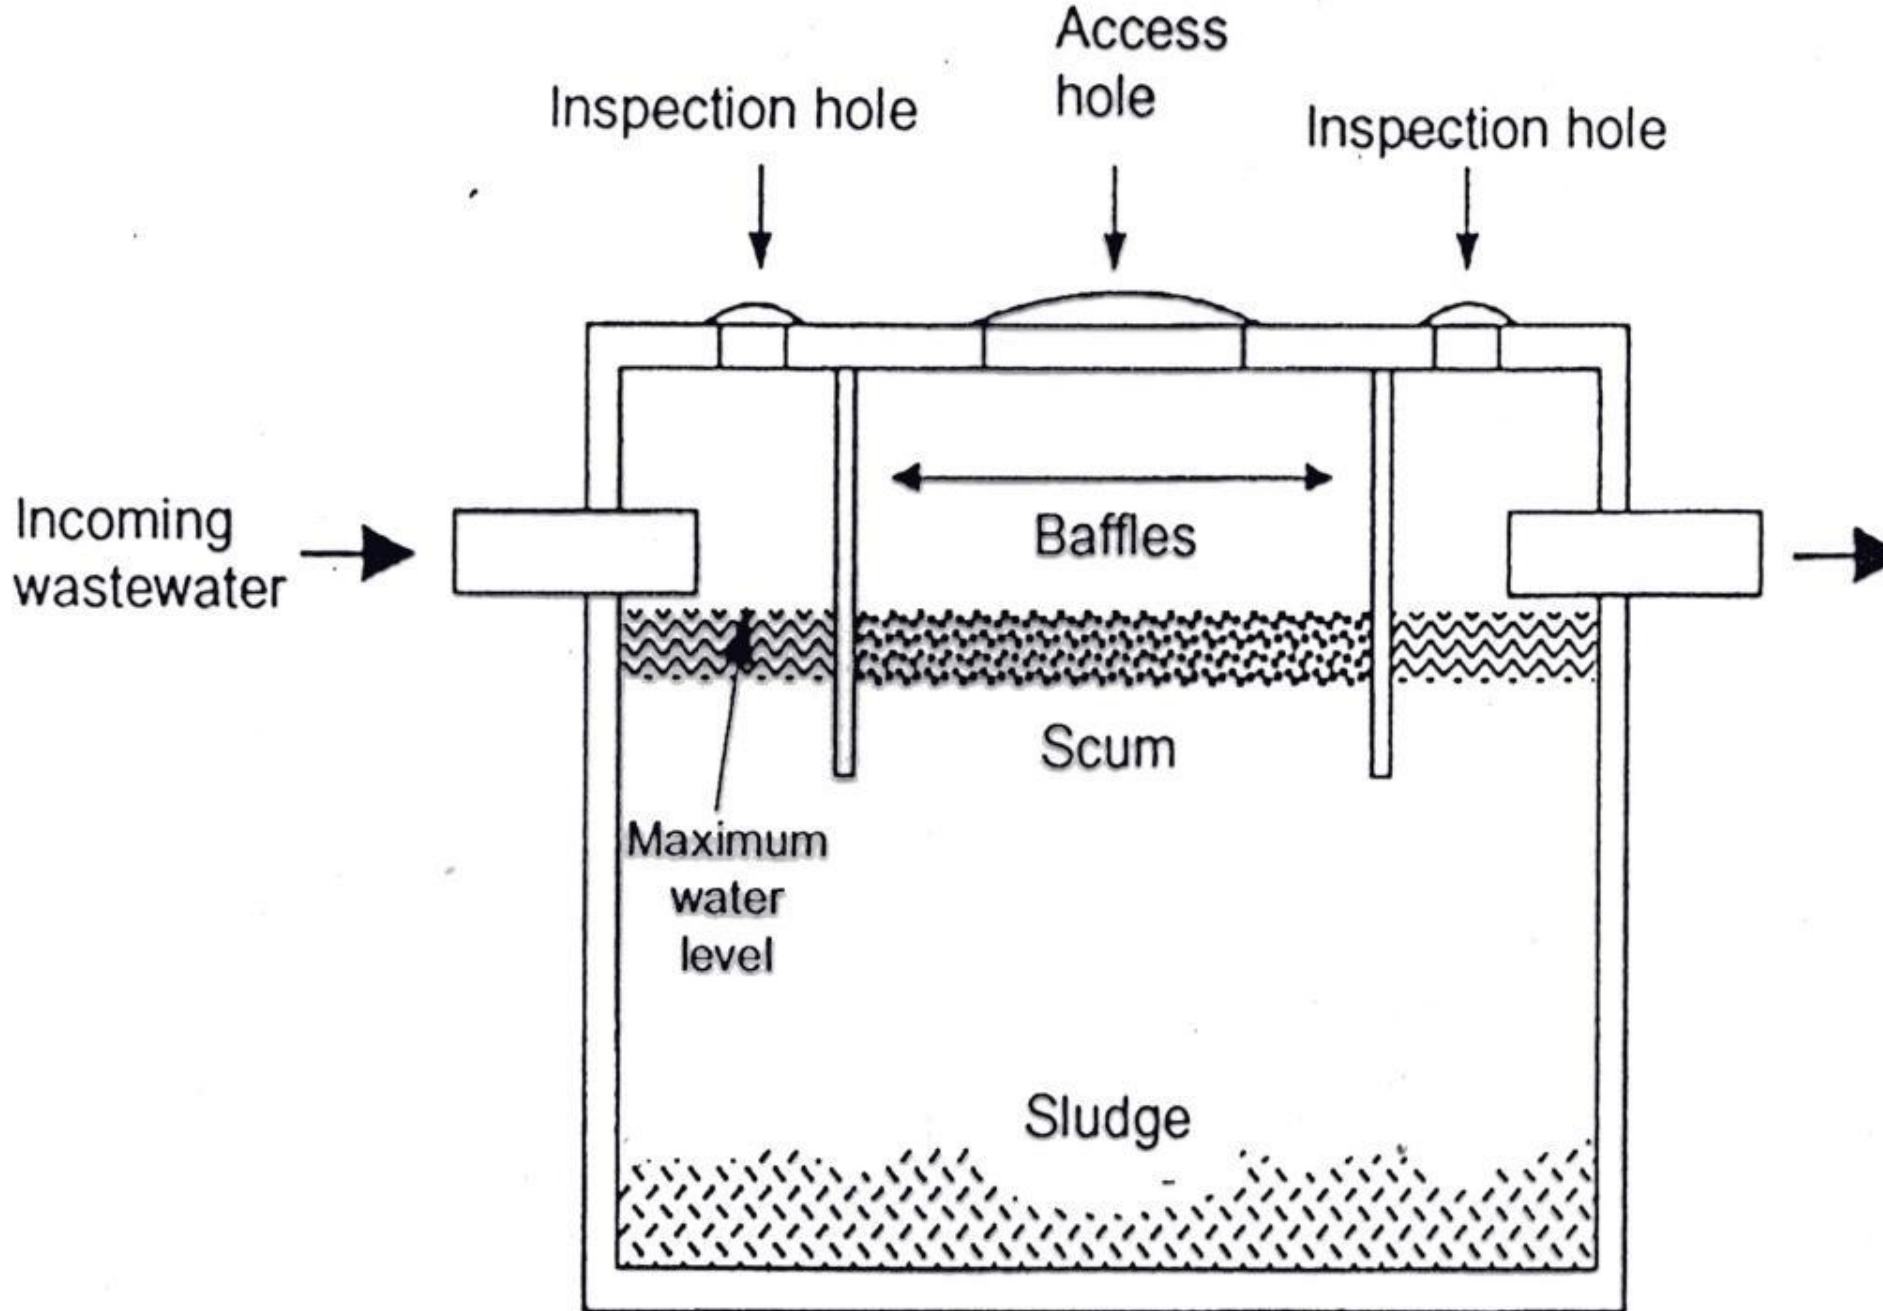

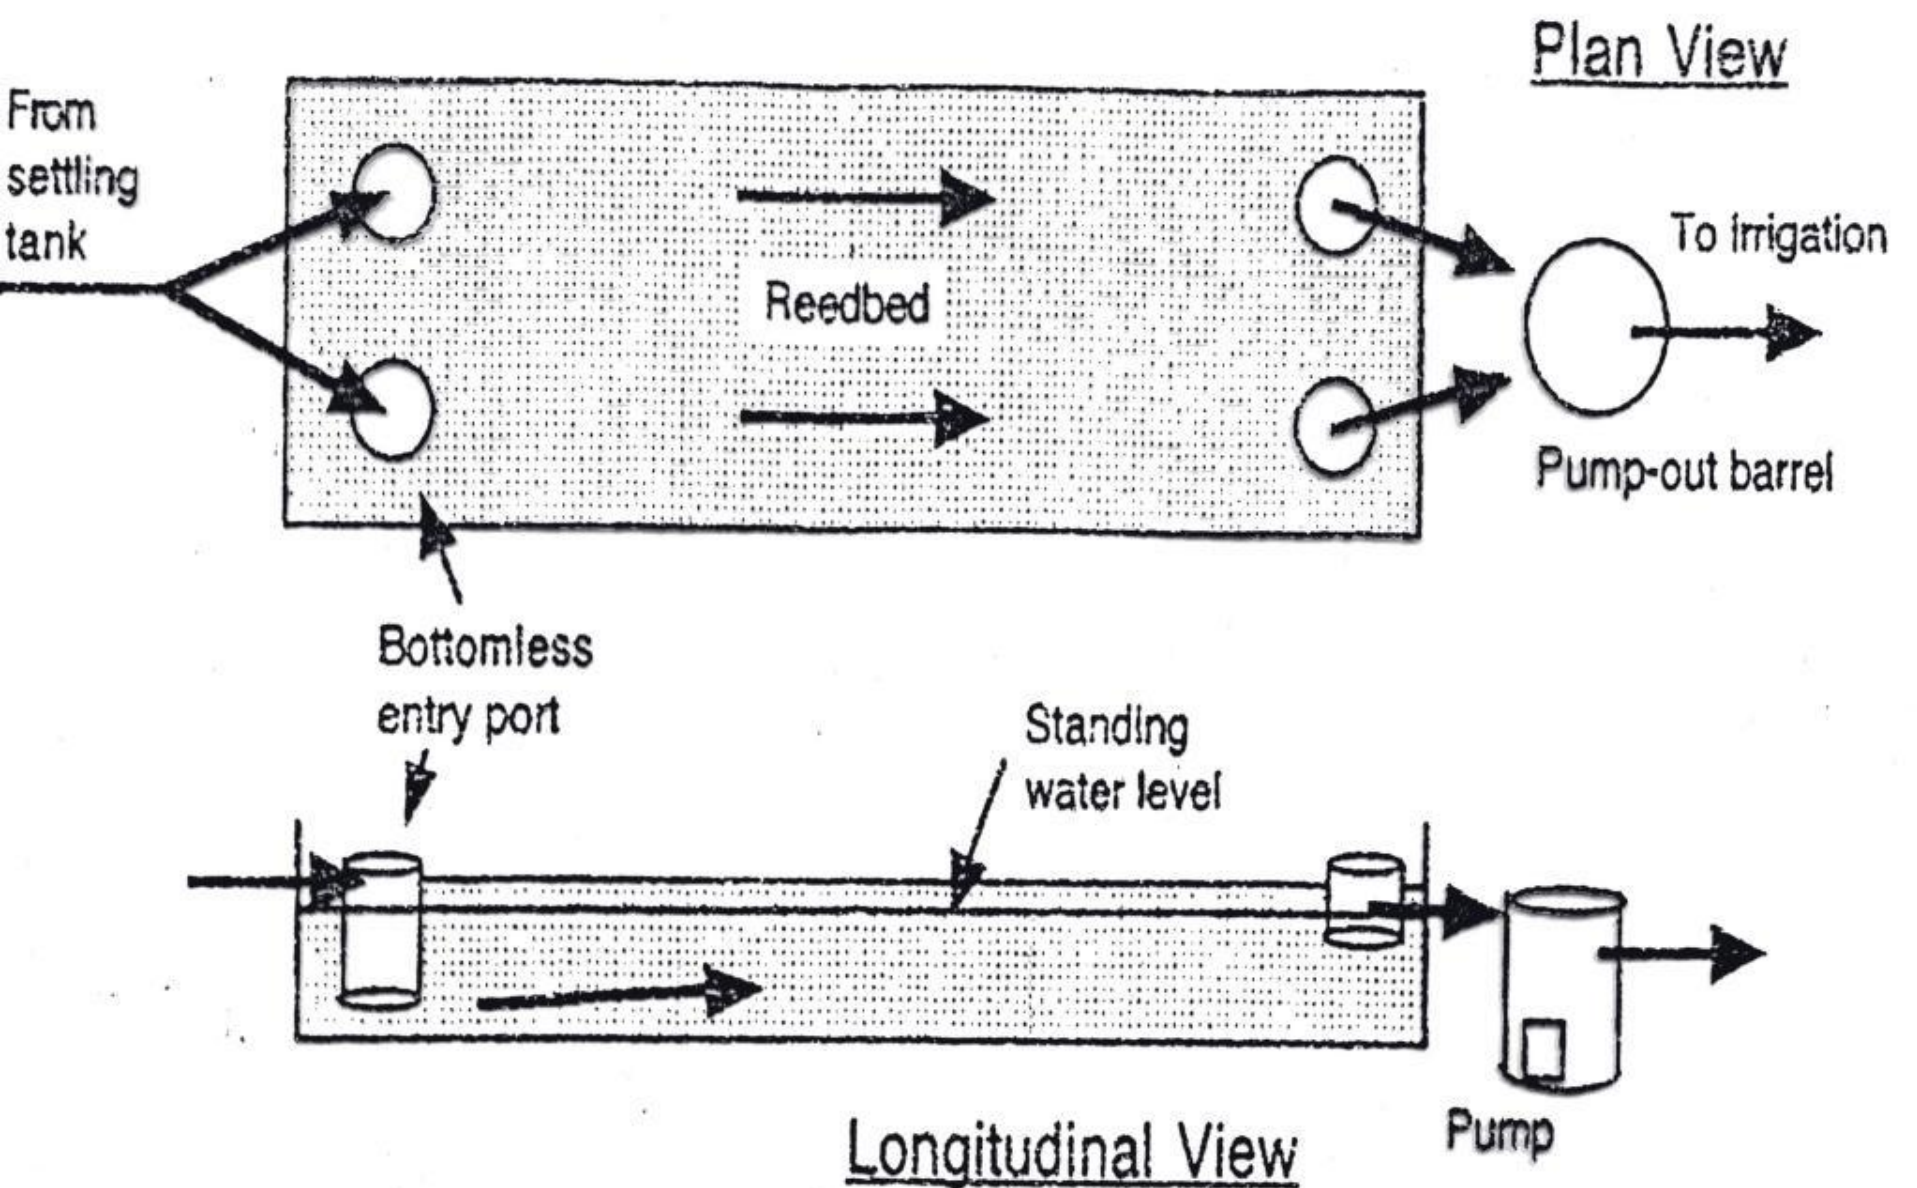

Design of reedbed for Enhanced Effluent Treatment System

Recycling wastewater at home

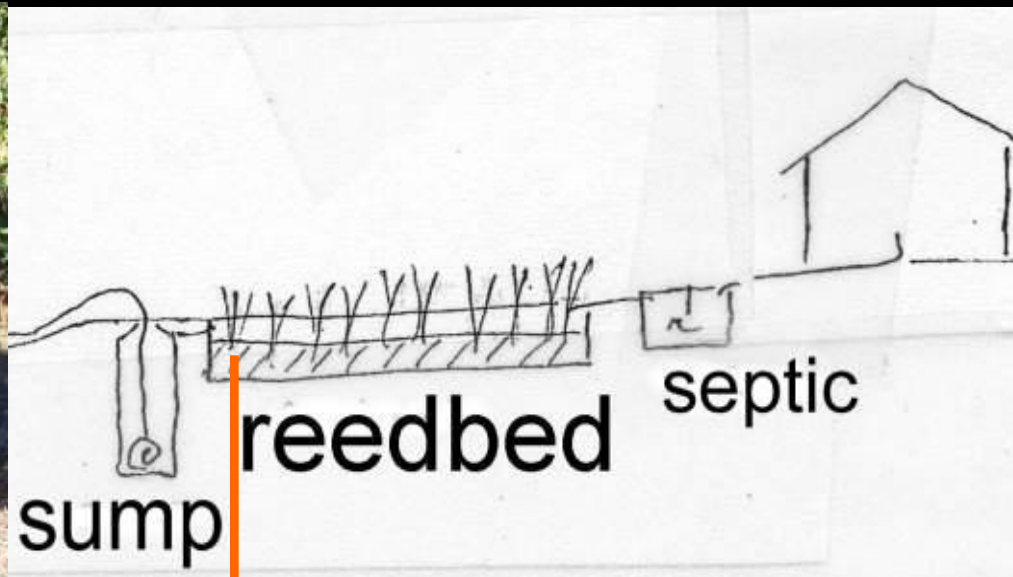

The average family's domestic reedbed enables the growing of 10-20 fruit trees on recycled water





Reedbed at the house, 2000

7.2m long

Not a good idea!





Typha domingensis

Bulrush

Cumbungi



Propagation of Nile Grass (*Cyperus involucralus*)





Cleaning Agents





Waste Water - the maths

- Reasonably frugal Australians each generate about 50 litres of waste water per day
If it all goes through a black water treatment system such as a septic tank and reedbed or an aerated septic system, it can be used to grow fruit
- A family of four generates 200litres per day..ie 53kilolitres per year, which will water and fertilize 20 fruit trees. This will provide more than enough fruit for the family
(It is not legal in SA to use grey or black water for vegetable growing unless specially treated)

Other water availability

Dams and creeks

Beware

- permissions required for dam installation/expansion
- badly made dams (pay for an experienced builder)
- small volumes and shallow storages; soakage and evaporation may take lots
- salty springs and soaks feeding into farm dams
- incorrect assumptions about run-off

Consider

- access to power for pumping
- elevation for provision of gravity feed
- dam liners

Rivers

- Security of supply? (will a reservoir be built above you)
- Floods and your pump (glug glug glug)
- Is water available when it is useful, or....?
- Aquifer recharge
- Will the river just die

Murray Mouth

An aerial photograph of the Murray Mouth in 1995. The image shows a large, shallow, yellowish-green lagoon with a sandy beach and a small settlement in the background. The water is a mix of green and yellow, indicating varying depths and sediment. The land is brown and appears to be a mix of natural and developed areas. The year '1995' is printed in large black letters on the right side of the lagoon.

1995

Source: Conservation Council of SA

0. 0. 200. FRANKI MANDOLINI



Murray Mouth

2000

Source: Conservation Council of SA



Murray Mouth



dredge

2003....


Bores

- Finding water- WaterConnect & 'Obswell'
- Getting an allocation
- Drilling licence
- Charges and electricity


Aquifer storage and recharge

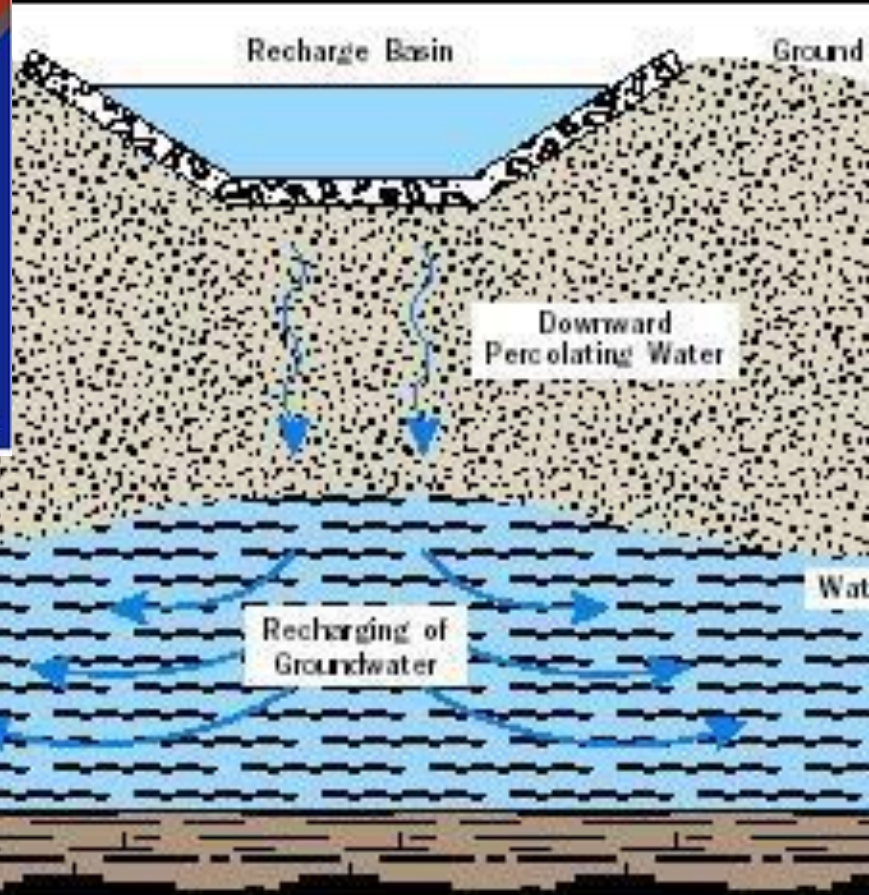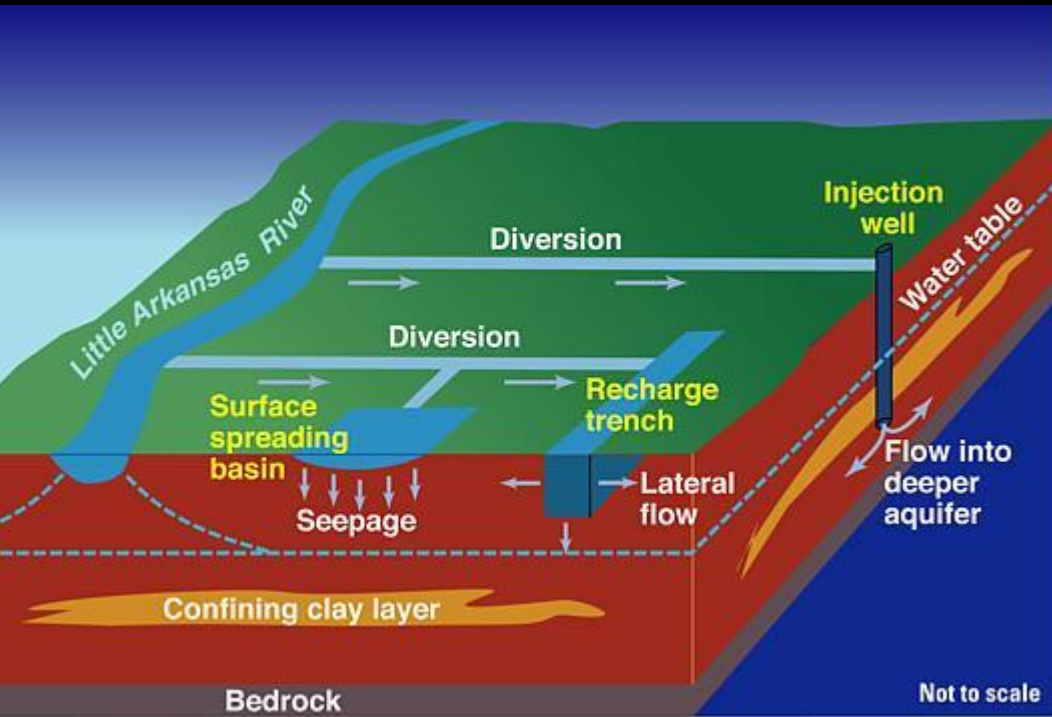

Injection Phase

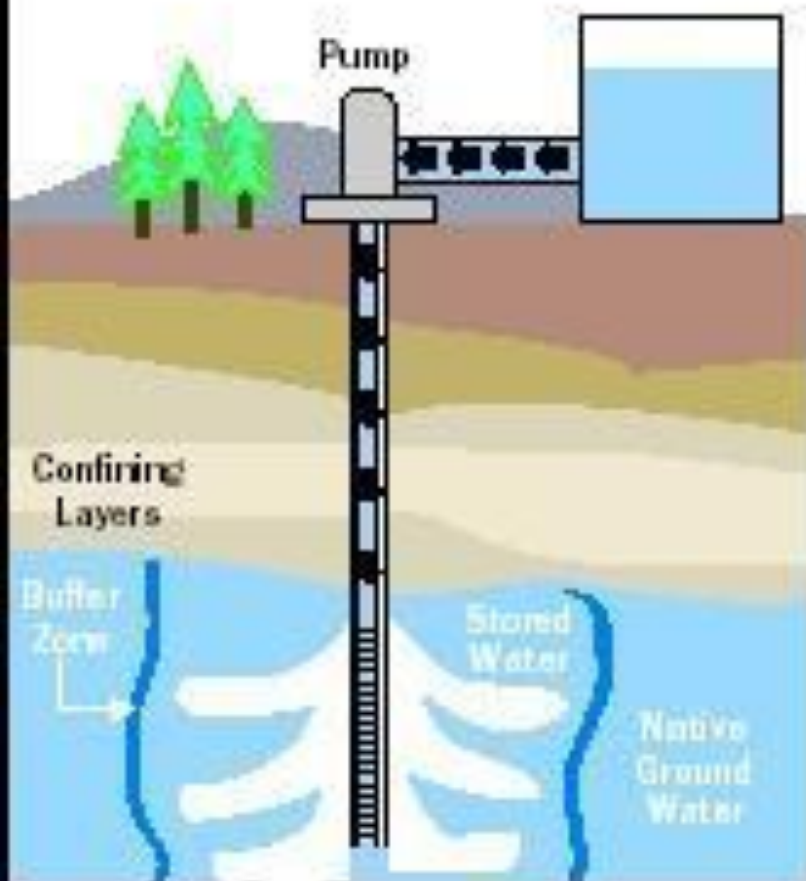

Recovery Phase

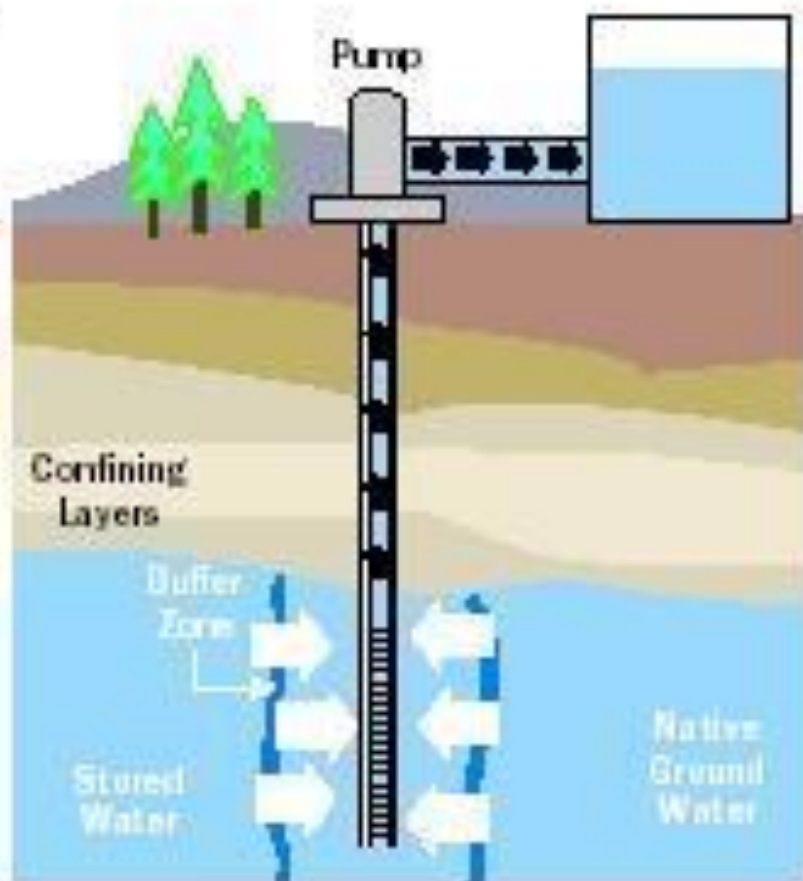



Mains

- access
- volume and pressure
- storage
- chlorine

Recycled water

- Access
- Volume
- Storage
- Chlorine

VIRGINIA IRRIGATION SCHEME

A joint initiative of the Government of South Australia,
South Australian Water Corporation, the Virginia Irrigation Association
and Earth Tech.

Reclaimed water used on this property is rated
Class A and is approved for unrestricted irrigation.
Its use for irrigation is safe and sustainable.



DO NOT DRINK



SA WATER



VIRGINIA IRRIGATION ASSOCIATION

E A R T H



T E C H

VIRGINIA IRRIGATION SCHEME

Reclaimed water used on this property is rated
Class A and is approved for unrestricted irrigation.
Its use for irrigation is safe and sustainable.

DO NOT DRINK



Water Quality

- Salinity (good salt and bad salt)
- Turbidity
- BOD
- Contamination
- Algae
- Chlorine

HORTICULTURAL CROPS AND GARDEN PLANTS

SALINITY

(maximum)

VEGETABLES

TREES

ORNAMENTALS

Ultra Sensitive

(Completely intolerant of salt)

300 mg/l.

Loquat

Violets

Sensitive

700 mg/L

French beans
Strawberry
Peas (not above 575)

Walnut

Bauhinia
Gladiolus
Fuchsia
Camelia
Azalea
Begonia
Dahlia
Poinsettia
Aster
Rose
Zinnia

Moderately Sensitive

850 mg/L

Beans (broad & field)
Celery
Lettuce
Potato (sweet)
Radish
Raspberry

Apple
Apricot
Almonds
Lemons
Orange
Grapefruit
Quince
Peach
Pear
Prune, Plum

Coprosma
Vinca
Bougainvillaea
Hibiscus
Carnation

Moderately Resistant

1300 mg/L

Onions
Broccoli
Cantaloup
Cauliflower
Cereals
Carrot (after 3-4
fern leaves)
Gherkins
Cucumber
Potatoes (must have


Grape vines
Fig
Olive
Pomegranate

Chrysanthemum
Stock
Oleander

Climate change impacts


- With a 10-15% decline in rainfall, runoff can reduce by 50%
- Plants will require more water and/or shade as temperatures rise
- Evaporation here is 2.3 m per year
- Salt is more likely to build up in soil



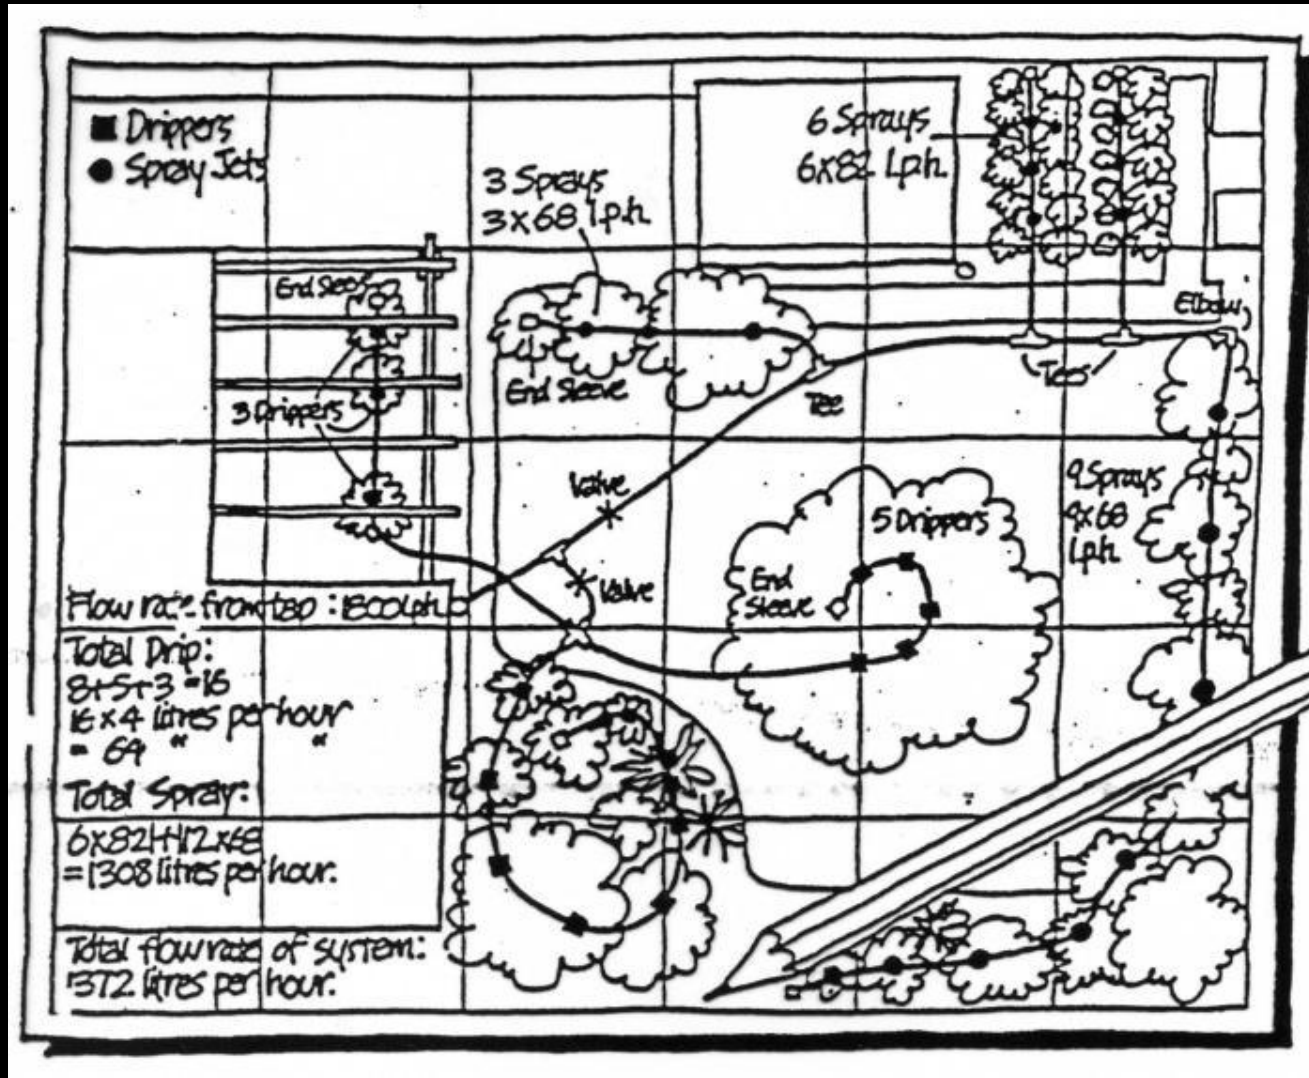

Draw a scale diagram and enlist the help of a good supplier

Hydraulic heads in irrigation

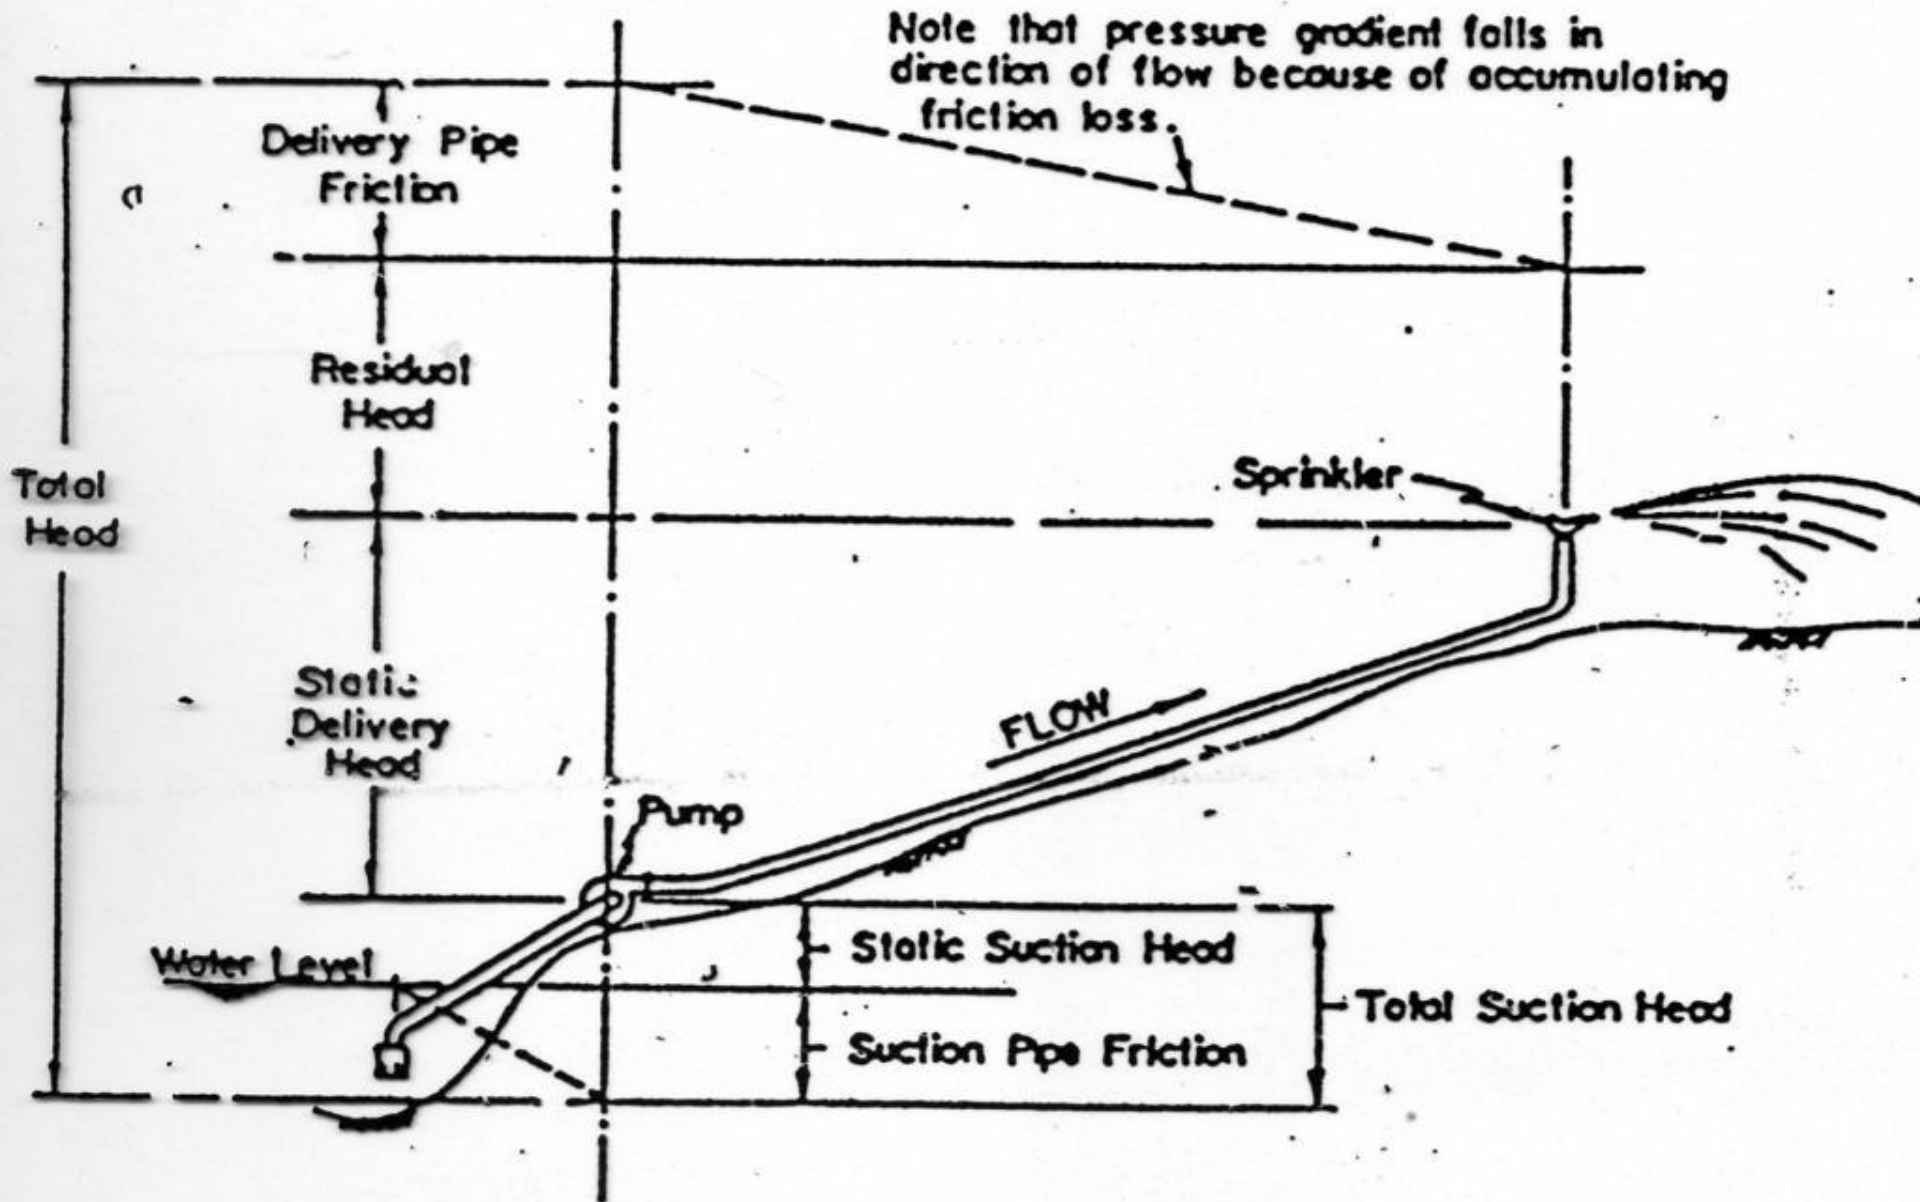

Application methods

Pumps

Fuel powered

- Portable
- Expensive to run and maintain
- High volume
- Variable pumping rate



Pumps

Electric

- Cheap to buy and run
- Fixed in place (flooding a problem?)
- High volume and high pressure

Solar

- Traditionally low volume or low pressure
- Expensive to buy per litre pumped but getting cheaper all the time
- Good for steady water transfer but poor for on-demand situations

Pumps

Windmills

- Low volume
- Maintenance can be tricky
- Generally used with a header tank or high dam

Pump Types and control systems

- Submersible
- Centrifugal
- Piston
- Other (Multi-stage etc)


Filters etc

- Dual source systems
- Non return valve
- Centrifugal
- Sand
- Disc
- Basket





Irrigation system layout

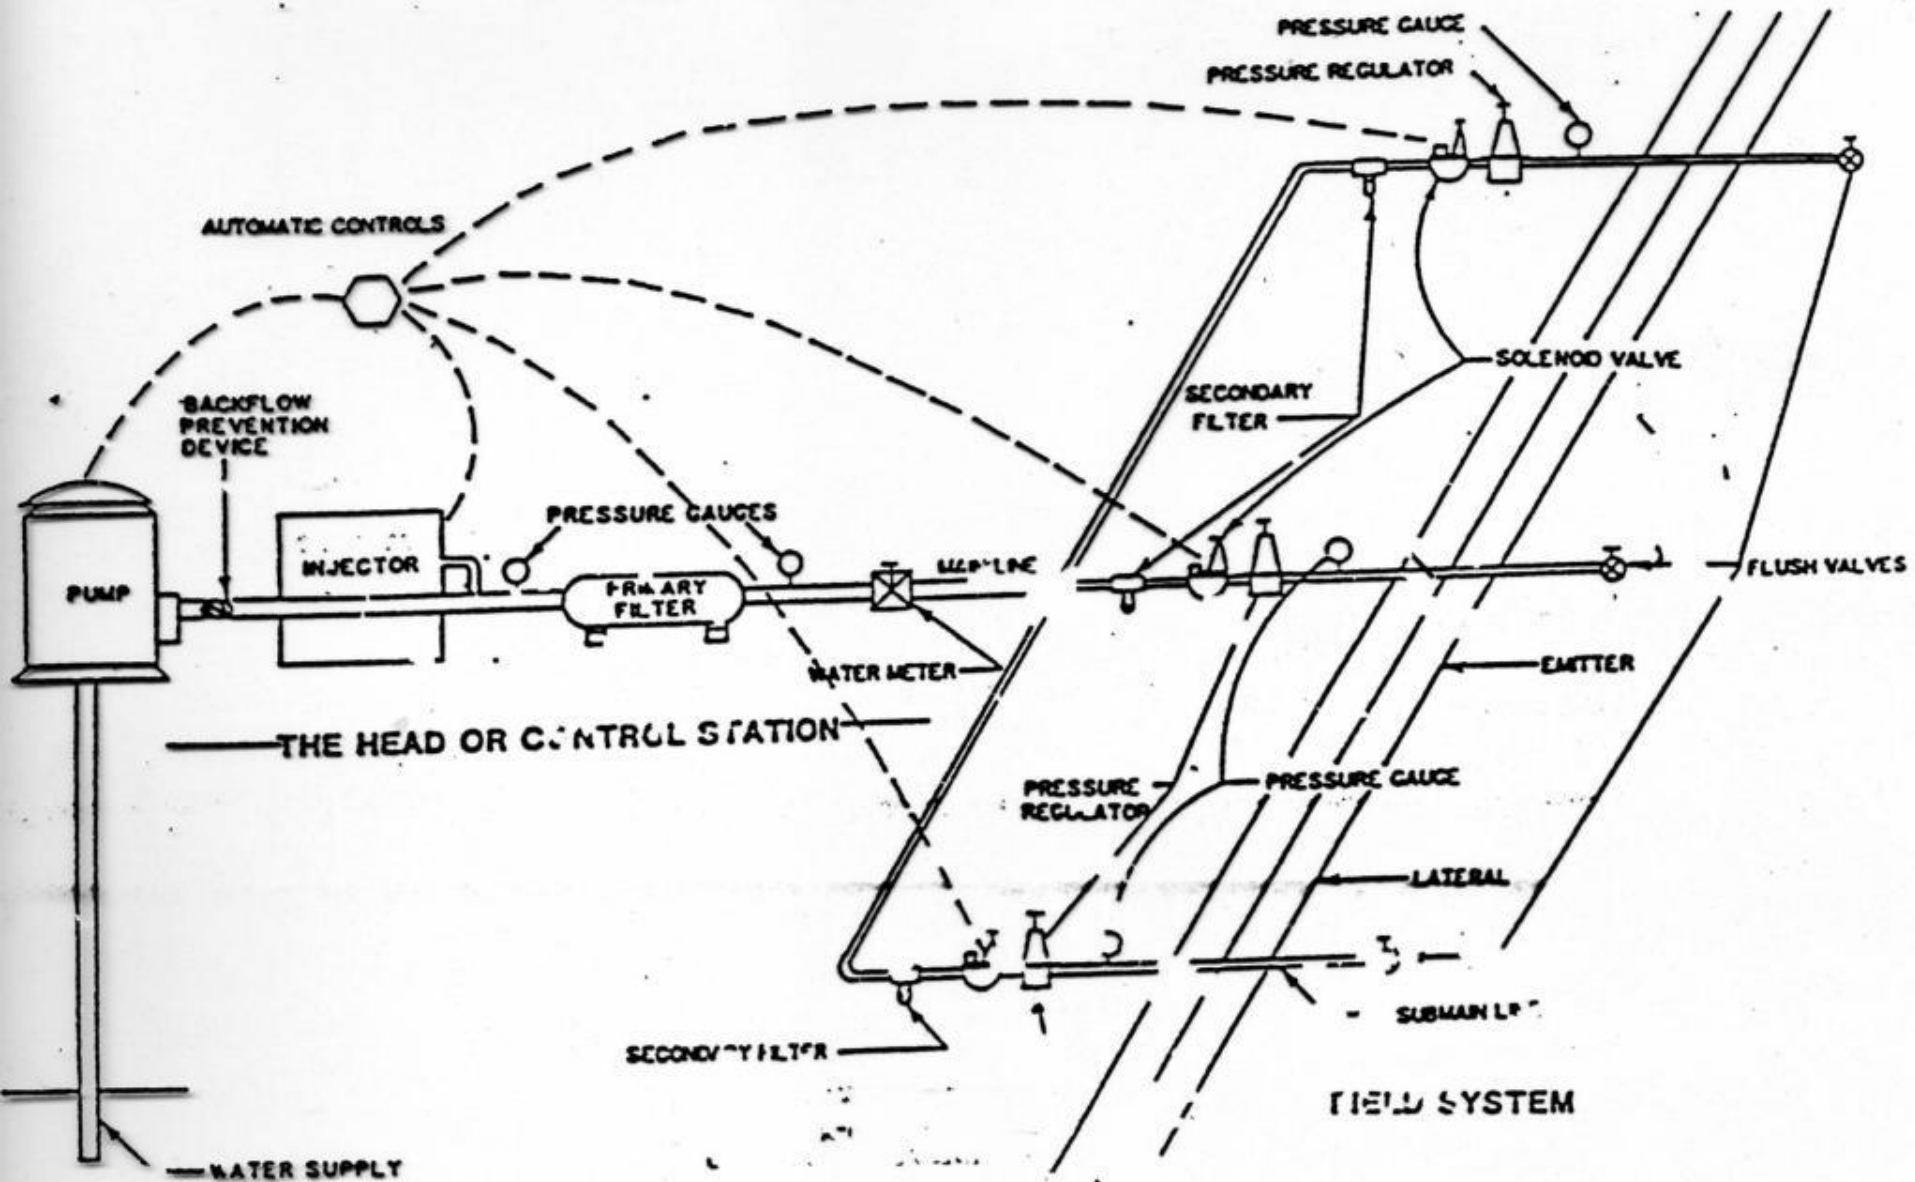


Pipe-work and emitters

- Pressure pipe – PVC and Poly mains and submains
- Control systems – sensor-linked, auto, semi auto and manual
- Solenoids manifolds trenching and wiring
- Low density pipework – submains and mains
- Low density laterals – sizing, types
- Drippers, sprinklers and micro-sprinklers

Irrigation controller


Typical Wiring Example for Six Stations

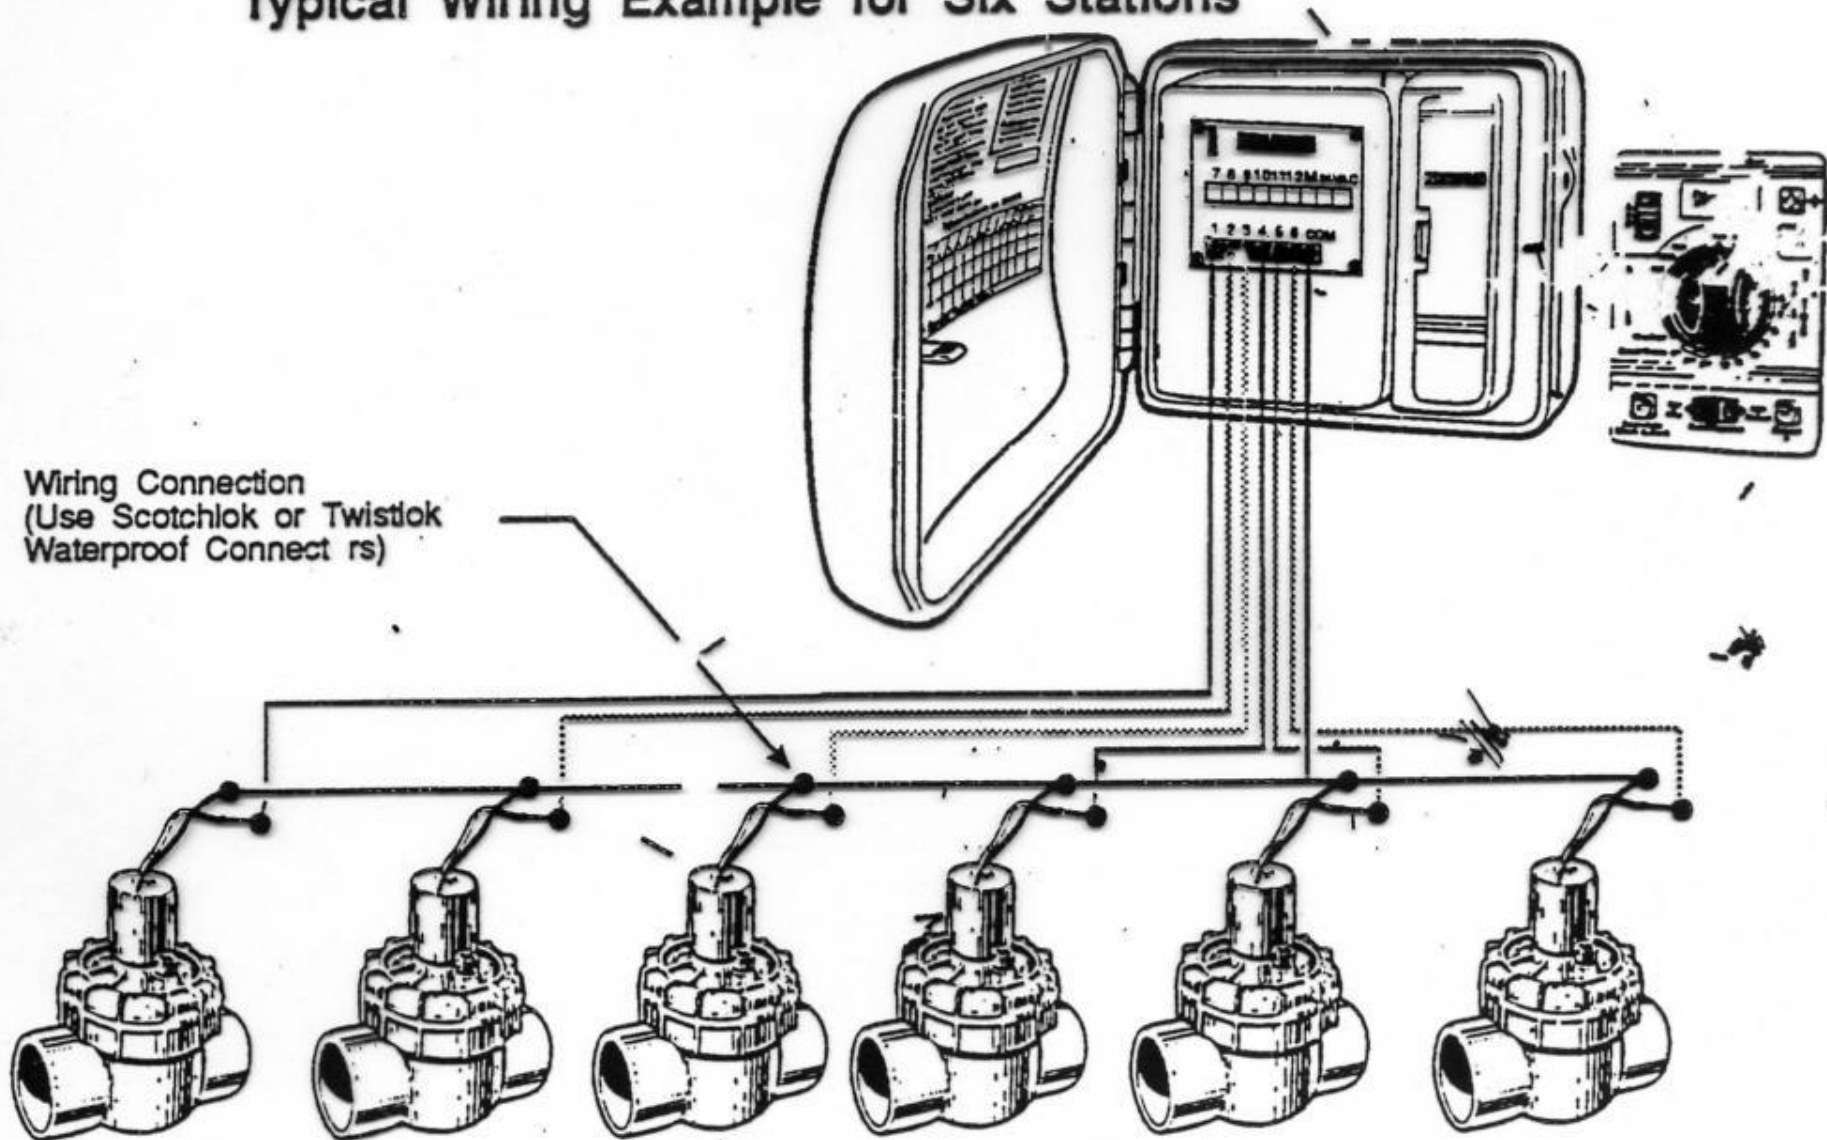


Lateral tube and fittings



Joiner

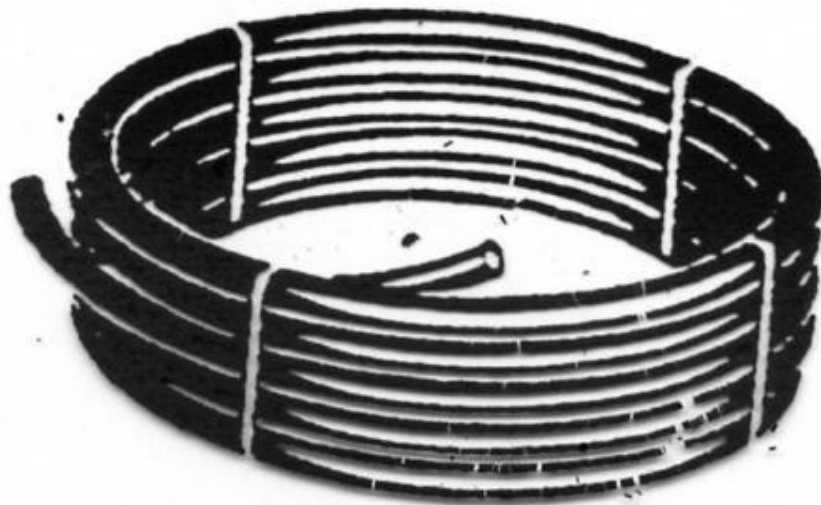

Poly Tubing

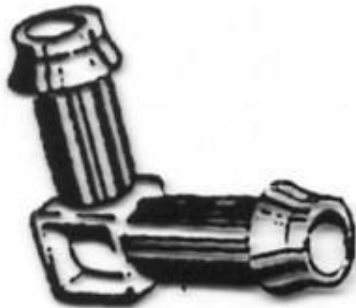

Elbow



Tee




Threaded Tee and Elbow

Fig.1-5 - Typical Lateral Pipework and fittings.




Emitters

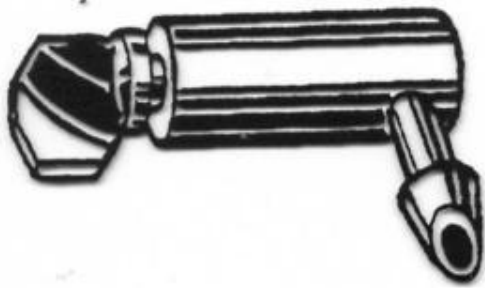


Snap



Turbo-K y.

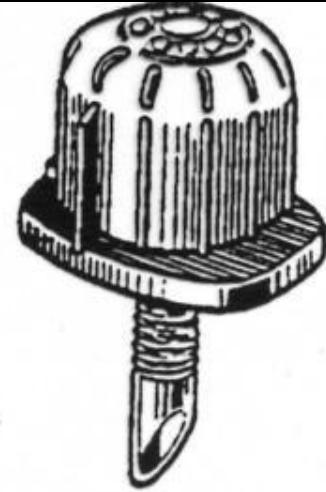


Trickler

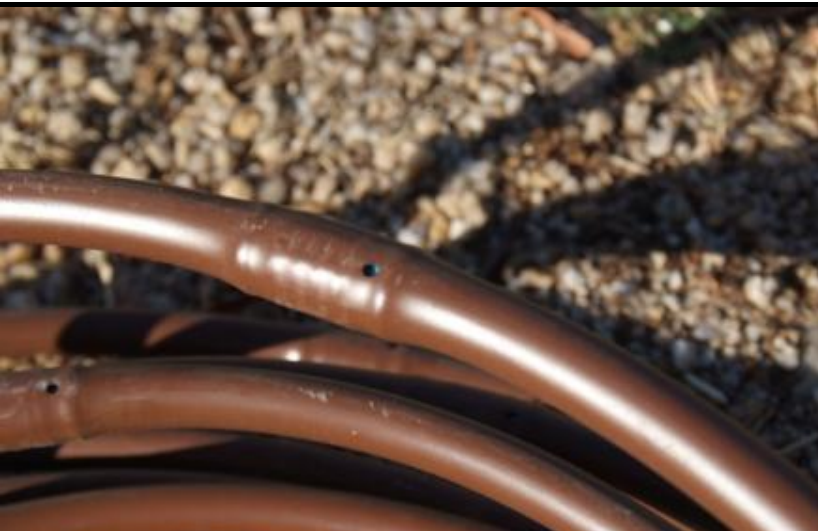







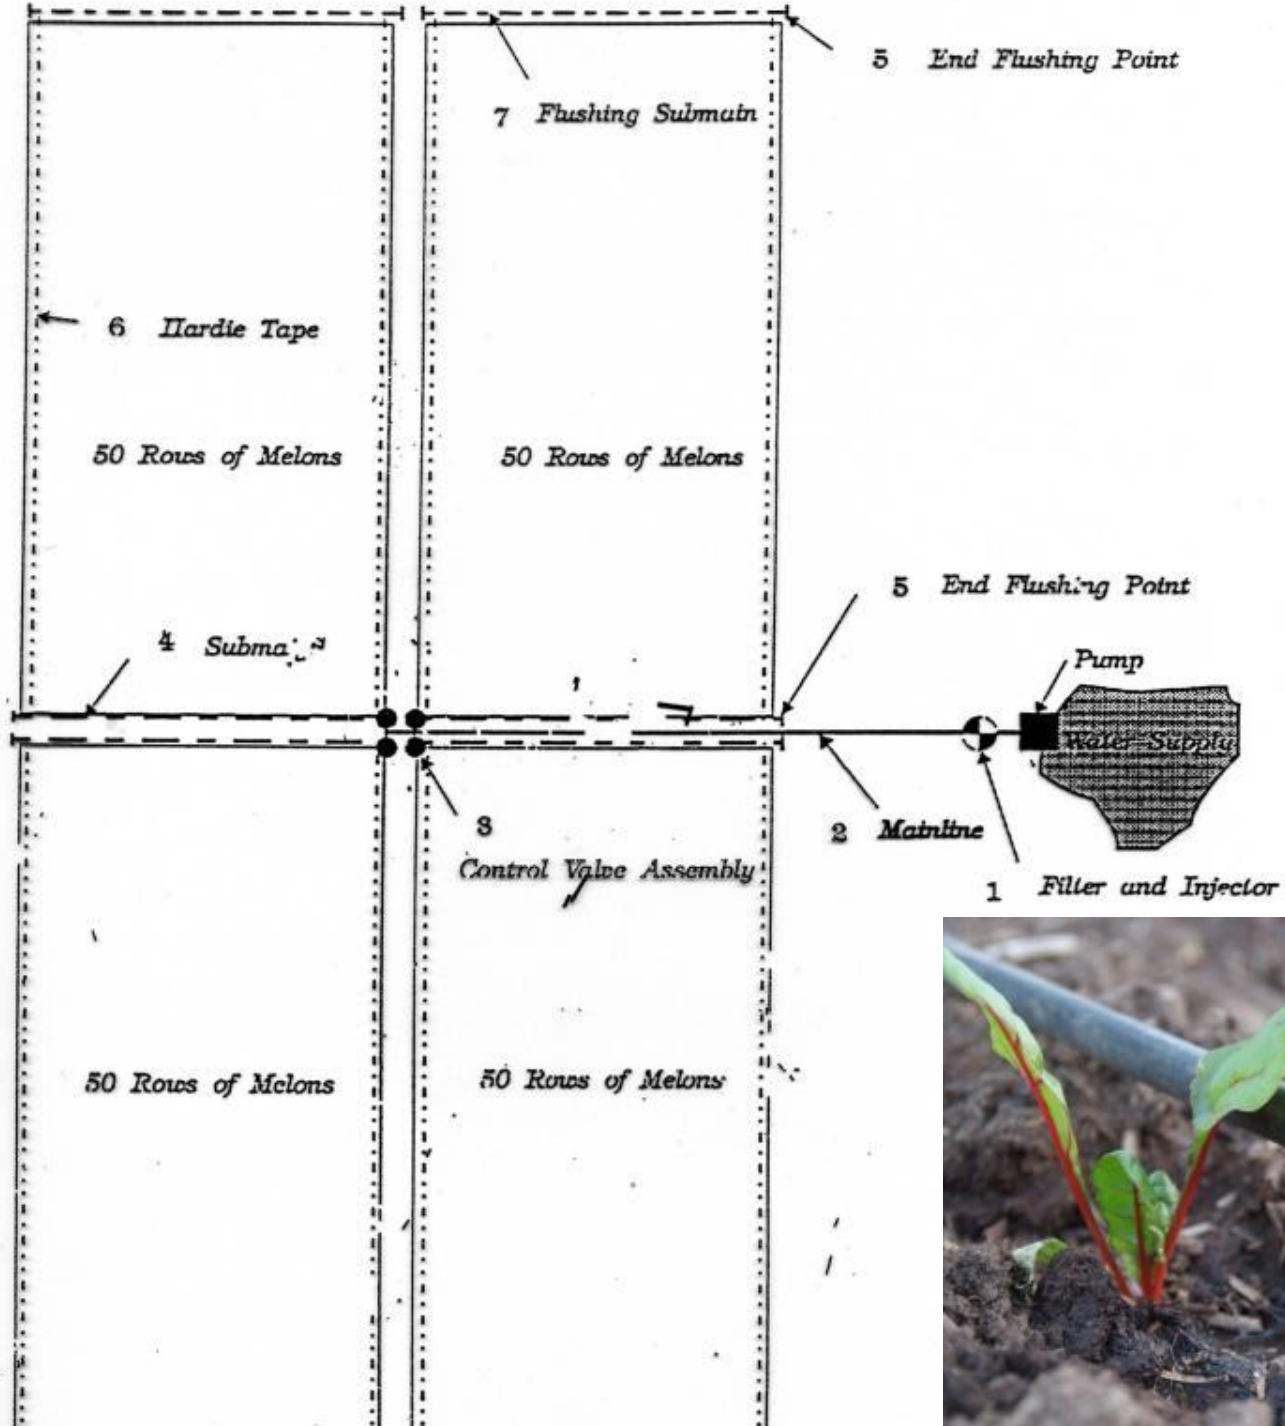





pecan nuts

homestead

pome fruit

veg.

scrub block

learning centre

agroforestry

cereals

bush tucker

carob block

experimental

pistachio nuts

Gawler River

forest

yabby ponds

walnuts

Impacts of soil type on water infiltration, storage and water repellence

- Good soil preparation with deep ripping prevents waterlogging and improves infiltration
- Using the same drip system, the wetted area in clay and loamy soils is 50% greater than in sandy soils
- There is a strong correlation between an increase in soil carbon and water holding capacity

Soil type influences wetting pattern


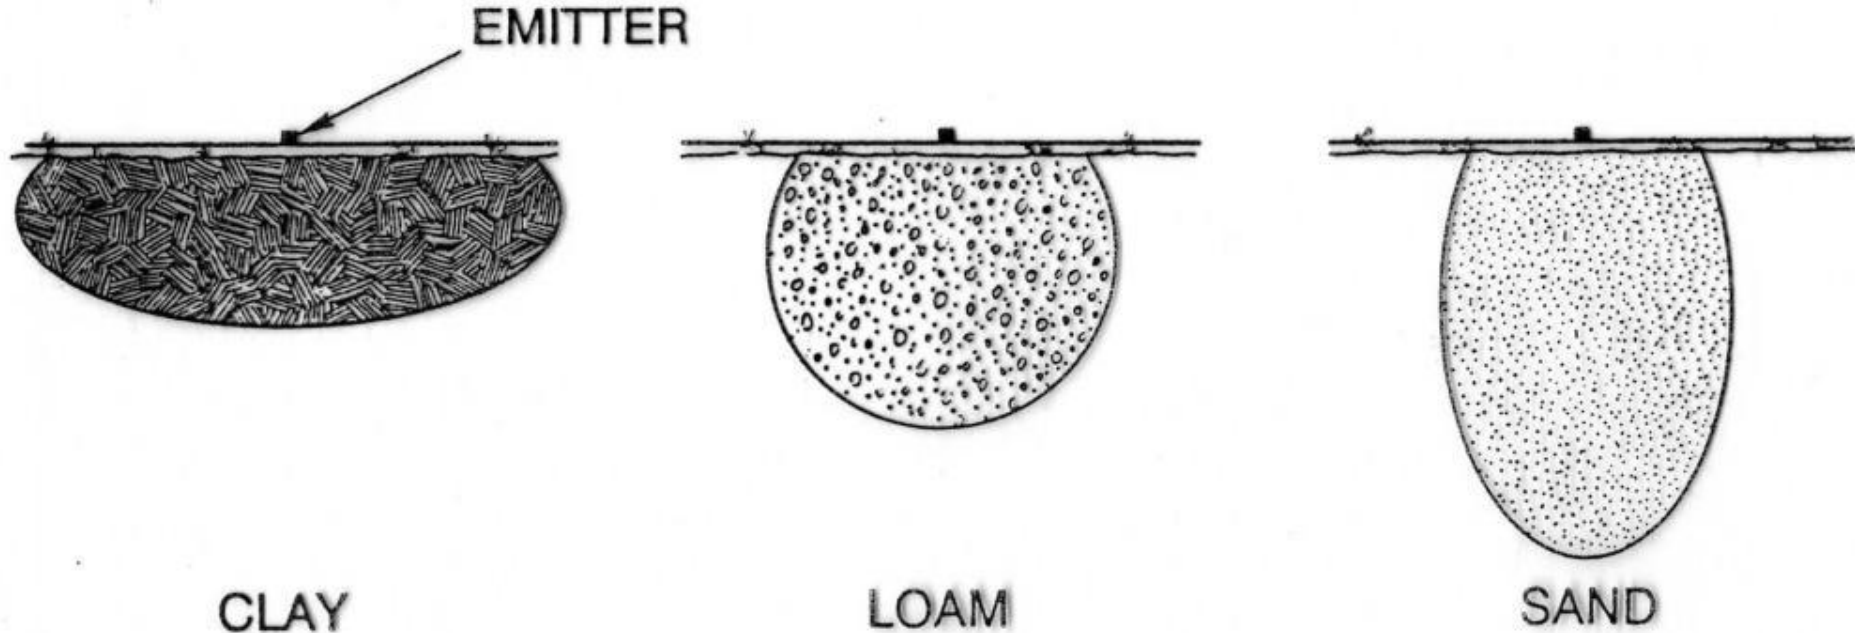


FIGURE 2-3: WETTING PATTERN SHAPES FOR CLAY, LOAM, AND SAND

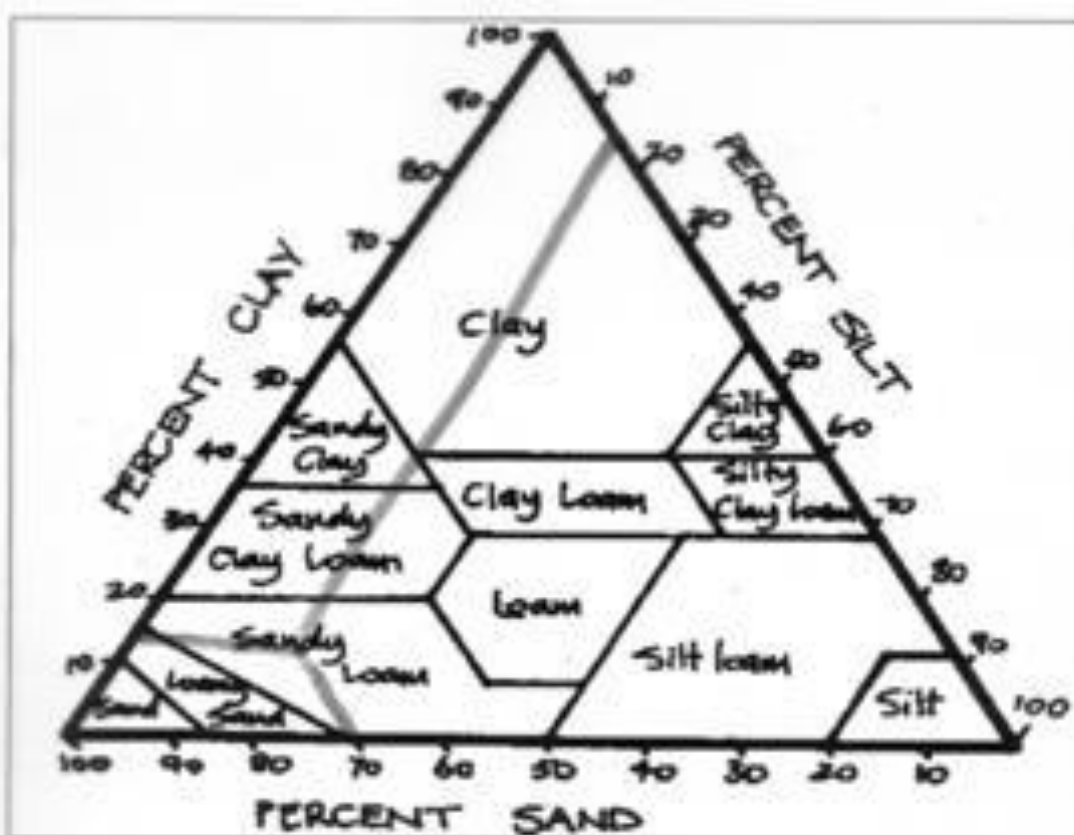

The Soil Texture Triangle
 Using the proportions derived from your Jar Test you can place your soil on the Soil Triangle; so if you had a sample with 15% clay, 70% sand and 15% silt you've got a sandy loam. (the imaginary line representing the clay is drawn across parallel to the Sand Axis, the sand percentage is drawn parallel to the Silt Axis and the silt percentage is drawn across parallel to the Clay Axis.

Water-holding and carbon

Changes in soil water-holding capacity with increased soil organic carbon


Change in OC level	Change in OC (kg/m ²)	Extra water (litres/m ²)	Extra water (litres/ha)	CO ₂ sequestered (t/ha)
1%	3.6 kg	14.4	144,000	132
2%	7.2 kg	28.8	288,000	264
3%	10.8 kg	43.2	432,000	396
4%	14.4 kg	57.6	576,000	528

Note: Based on a soil depth of 30 cm and a soil bulk density of 1.2 g/cm³

OC – Organic carbon

Source: Jones (2006)

Composted mulch improves soil water utilisation

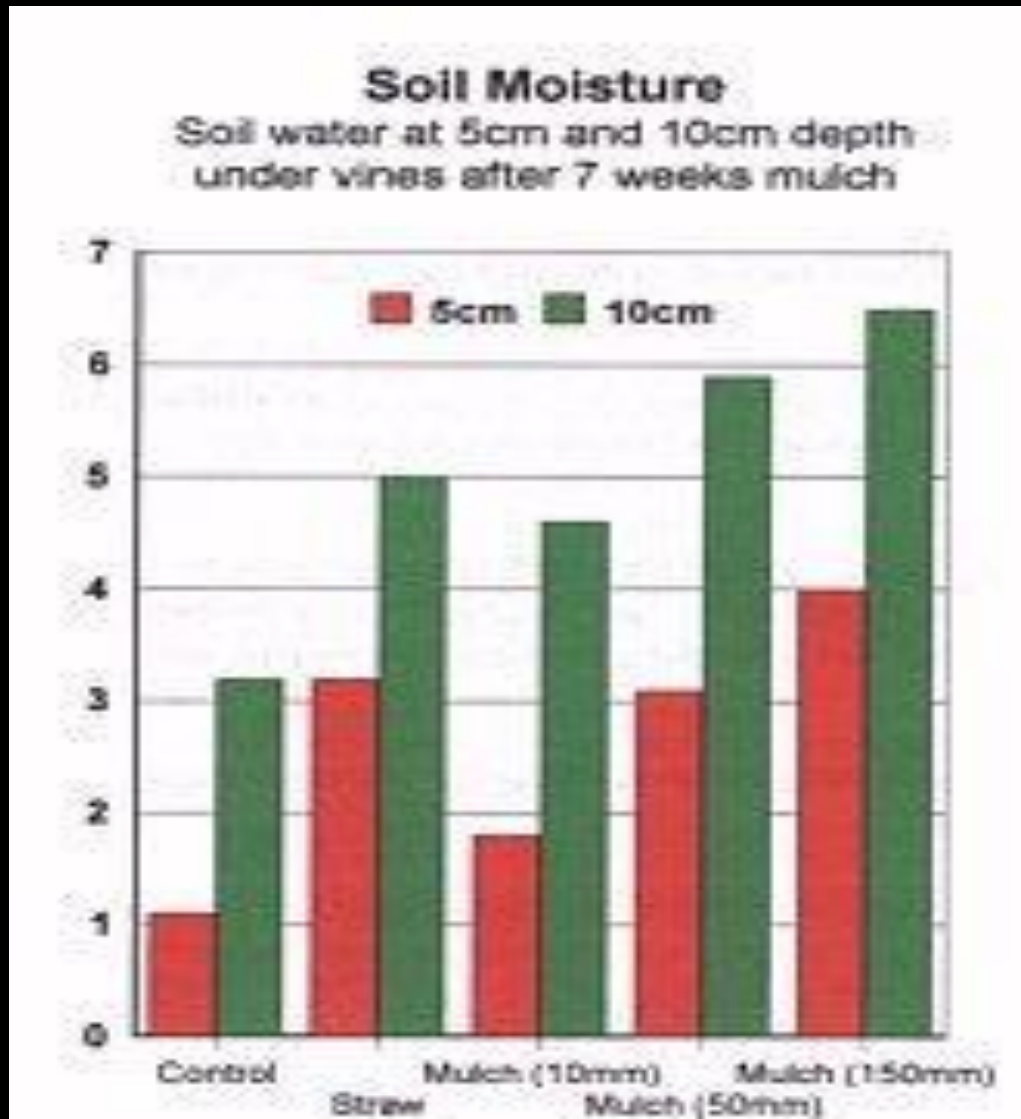



Mulch spreading





Compost improves soil water utilisation


• Rosemount regional vineyard manager Kym Ayliffe says 'We put it on vines that were struggling at Langhorne Creek; with the compost we had a 30pc increase in bunch weight. That means we've paid for half the capital outlay in one year '

How much water?

- Depending on the type of fruit, climate and soil, the requirement for irrigation water can vary from 0.5 -10 megalitres per hectare of mature trees or vines.
- Some authorities are limiting entitlements for vineyards to 100mm of irrigation (1 megalitre per hectare)
- Over-watering is a cause of plant diseases and leads to contamination of waterways and reservoirs, eutrophication and loss of native organisms in ecosystems


Irrigation Scheduling

- Ensure vigorous flowering and early fruit growth by maintaining good soil moisture during September and October.
- This involves irrigation, weed control and mulching. In areas where frost is prevalent, mulching is delayed by some weeks
- Prevent major water stress in the crop during the growing season
- Step up irrigation in the last month of ripening to grow the size and quality of fruit

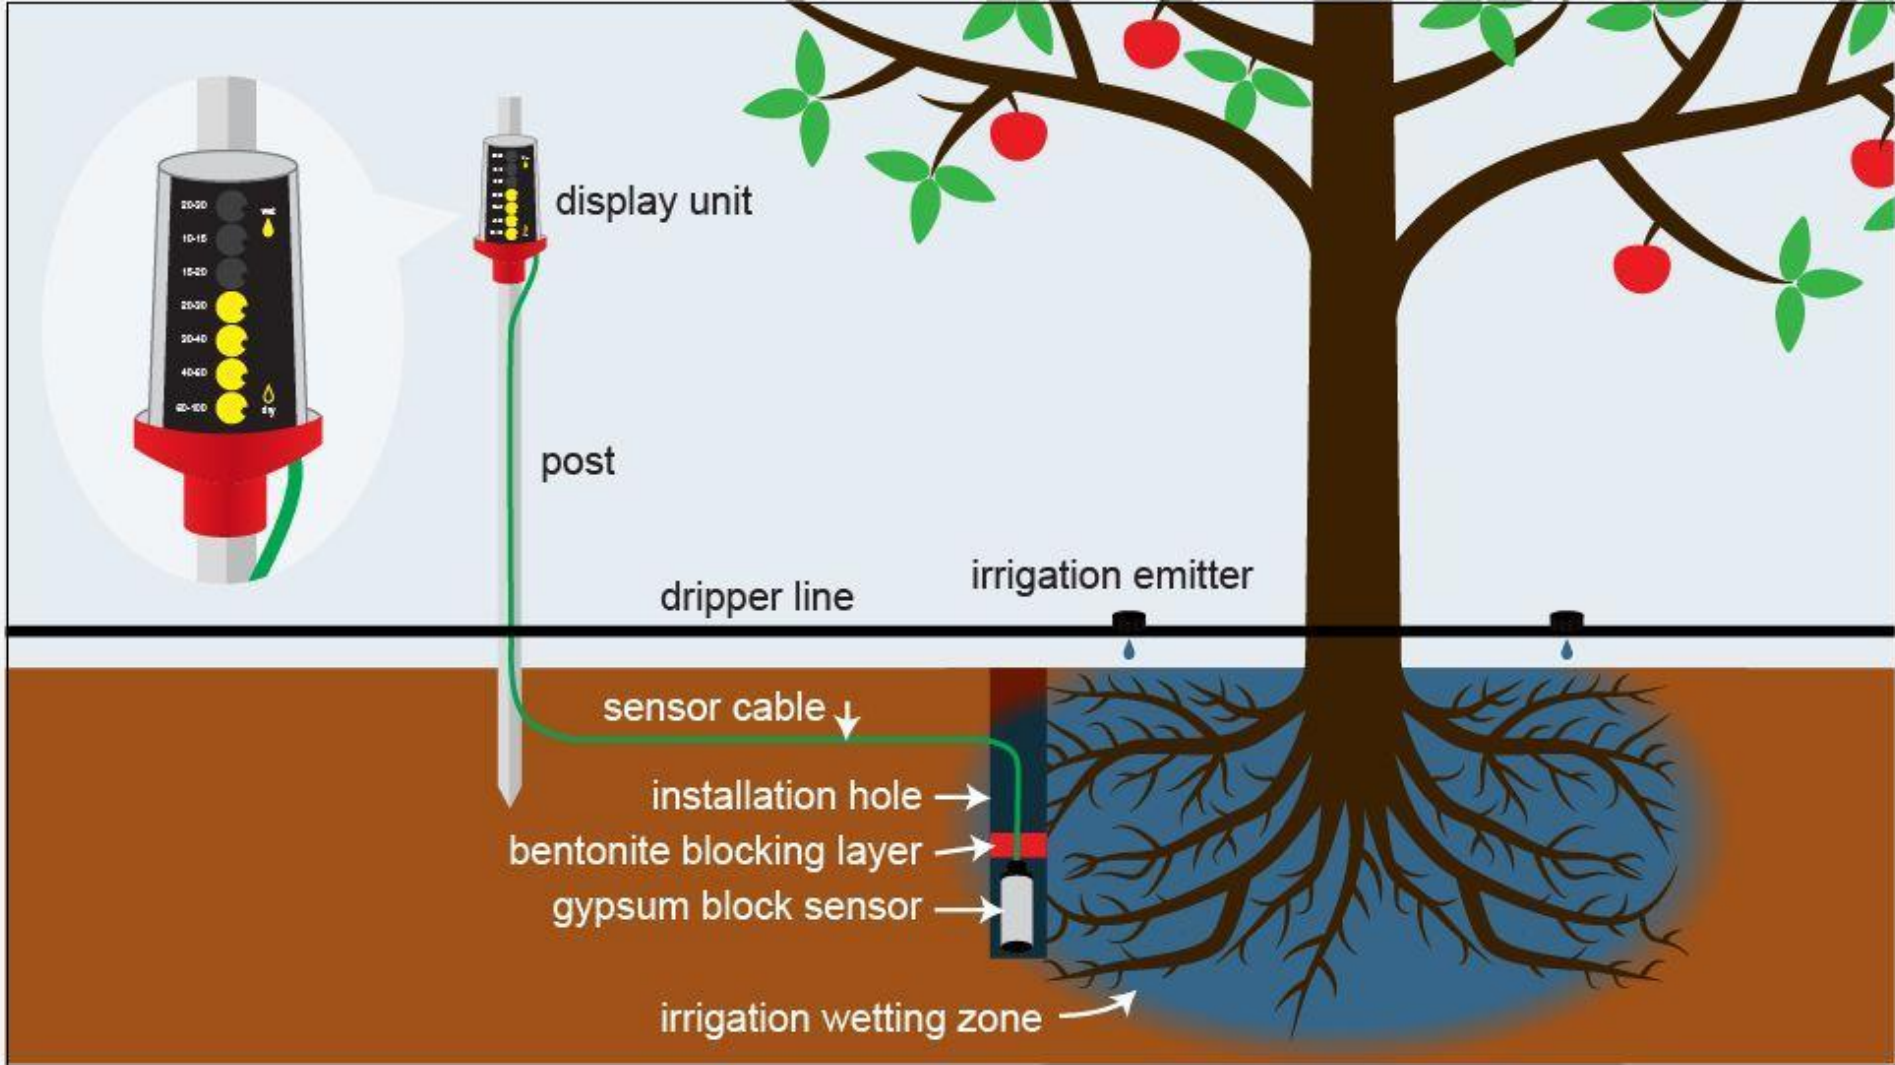

Economical and easy-to-use gypsum block sensor to measure soil moisture tension, by MEA

Soil moisture monitoring equipment (Sentek)

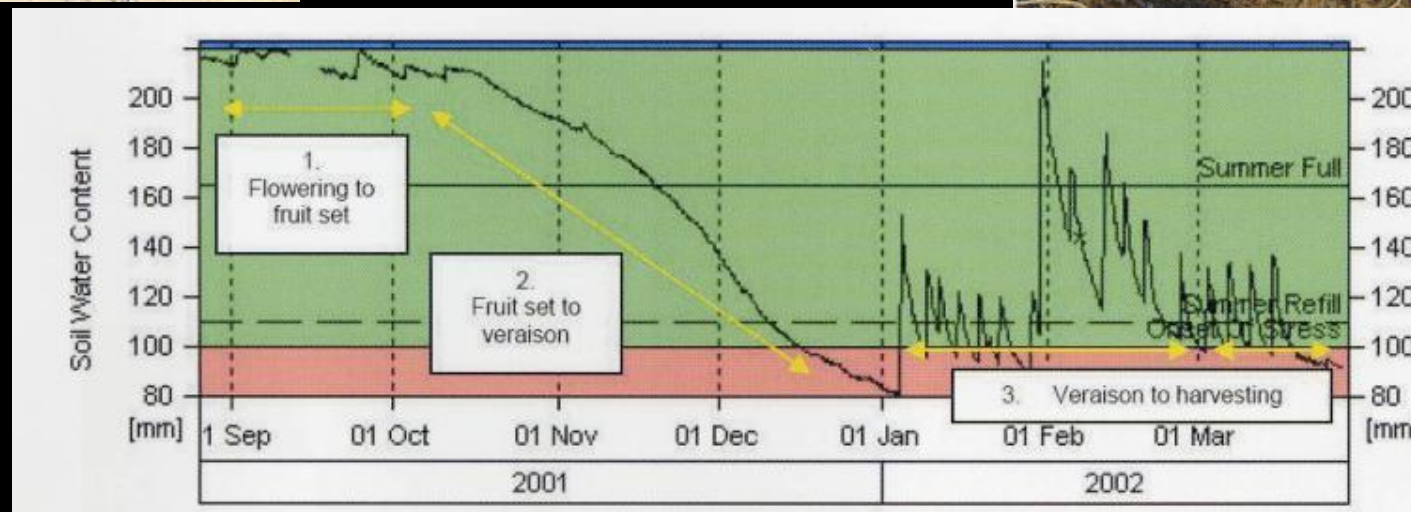


Provide controlled growing conditions





Externally shaded 'glasshouse'



Retractable shade + wind shelter

TYPE	CONSTRUCTION	SHADE	ENERGY SAVING
OLS 50		51%	25%
OLS 60		66%	30%
OLS 70		75%	35%

KEY  Aluminium strip  No strip



eg with Svensson thermal fabrics

Potential water savings



Savings of up to 40% have been achieved in hot environments with no loss of yield and an increase in quality



Fertigation



- A system for adding nutrients through the irrigation water
- Solutions or fine suspensions can be sucked or pumped into the irrigation main at a known rate
- Applications are usually done late in the watering
- Urea, liquid fish, trace elements and beneficial microbes can all be applied in this manner

Fertigation and filtration





- Venturi

Water for Fire control



- Fireproof elevated storage (always full)
- Buried or fireproof pipework
- Mains plus independently pressurised supply
- Mobile fire-fighting units (filling points)
- Sprinkler and hose system
- Good property and building design
- Fire-plan